

End clamp - E/MBK

1401637

<https://www.phoenixcontact.com/de/produkte/1401637>



Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



End clamp, width: 6.2 mm, color: gray

Your advantages

- Large-surface labeling
- Can be screwed onto NS 15 DIN rails
- Can be mounted directly on the mounting plate as an MBK terminal block base

End clamp - E/MBK

1401637

<https://www.phoenixcontact.com/de/produkte/1401637>



Commercial Data

Item number	1401637
Packing unit	100 pc
Minimum order quantity	100 pc
Sales Key	B1 - Markierung Montage
Product Key	BE7111
Catalog Page	Page 539 (C-3-2019)
GTIN	4017918020484
Weight per Piece (including packing)	1,62 g
Weight per Piece (excluding packing)	1,62 g
Customs tariff number	39269097
Country of origin	PL

End clamp - E/MBK

1401637

<https://www.phoenixcontact.com/de/produkte/1401637>

Technical Data


Product properties

Product type	End block
--------------	-----------

Connection data

Tightening torque	0.4 ... 0.5 Nm
-------------------	----------------

Dimensions

Dimensional drawing	
Width	6.2 mm
Height	11.4 mm
Height NS 35/7,5	13 mm
Length	22 mm

Material specifications

Color	gray
Material	PA
Flammability rating according to UL 94	V2
Coating	3.2 mm fixing hole

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 15
---------------	-------

End clamp - E/MBK


1401637

<https://www.phoenixcontact.com/de/produkte/1401637>



Drawings

Dimensional drawing

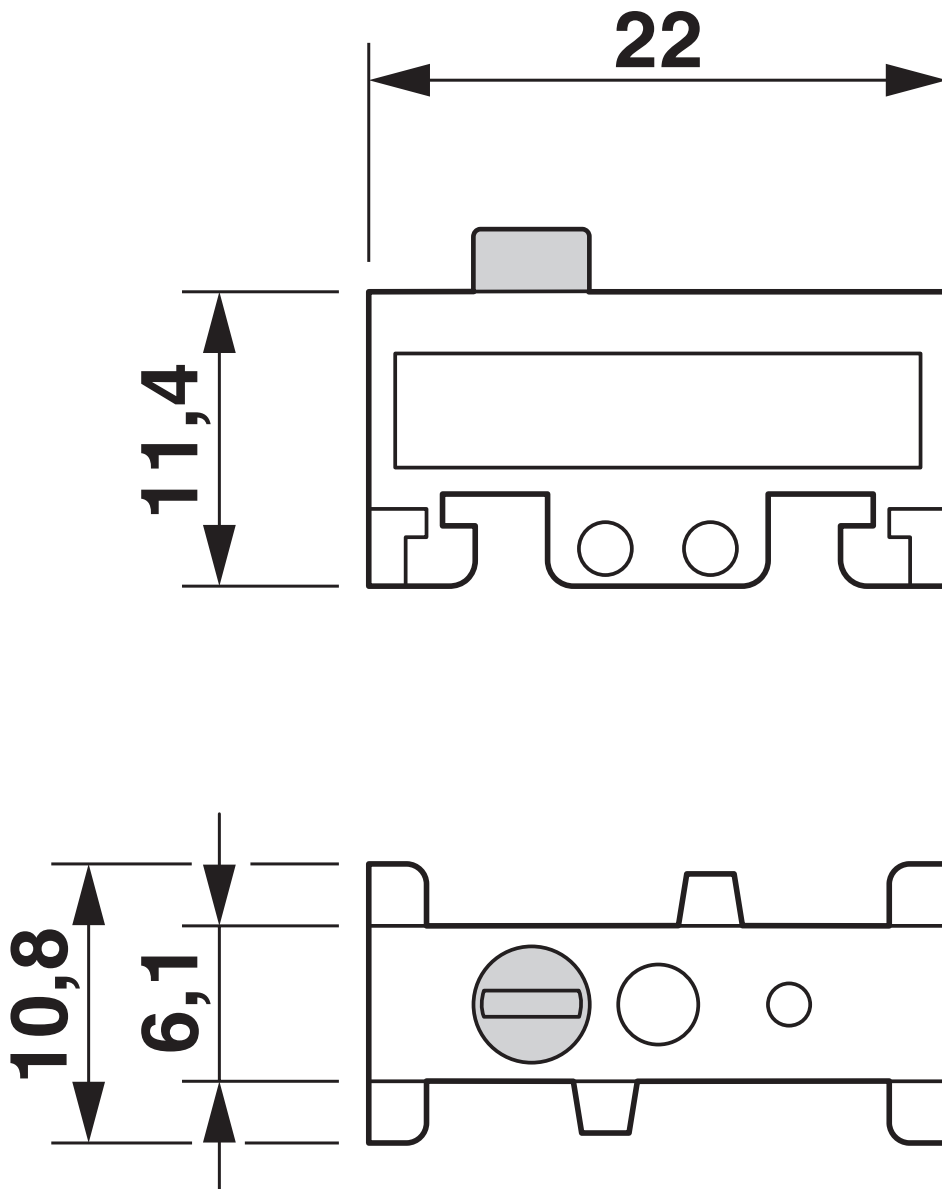

End clamp - E/MBK

1401637

<https://www.phoenixcontact.com/de/produkte/1401637>



Classifications

ECLASS

ECLASS-9.0	27141135
ECLASS-10.0.1	27141135
ECLASS-11.0	27141135

ETIM

ETIM 8.0	EC001041
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

End clamp - E/MBK

1401637

<https://www.phoenixcontact.com/de/produkte/1401637>



Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values
------------	---

End clamp - E/MBK

1401637

<https://www.phoenixcontact.com/de/produkte/1401637>



Accessories

DIN rail, unperforated

DIN rail, unperforated - NS 15 UNPERF 2000MM VPE 10 - 1401695

<https://www.phoenixcontact.com/de/produkte/1401695>




DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 10 (20 m)

Terminal strip marker carrier

Terminal strip marker carrier - KLM 1 - 1004319

<https://www.phoenixcontact.com/de/produkte/1004319>



Terminal strip markers, for use with end clamps E/MBK or CLIPFIX 35, lettering field size: 24 x 4 mm

End clamp - E/MBK

1401637

<https://www.phoenixcontact.com/de/produkte/1401637>



DIN rail perforated

DIN rail perforated - NS 15 PERF 2000MM VPE 10 - 1401682

<https://www.phoenixcontact.com/de/produkte/1401682>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 10 (20 m)

DIN rail perforated

DIN rail perforated - NS 15 AL PERF 2000MM VPE 10 - 1401763

<https://www.phoenixcontact.com/de/produkte/1401763>



DIN rail perforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 10 (20 m)

End clamp - E/MBK

1401637

<https://www.phoenixcontact.com/de/produkte/1401637>



DIN rail perforated

DIN rail perforated - NS 15 WH PERF 2000MM-VPE 10 - 1204096

<https://www.phoenixcontact.com/de/produkte/1204096>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH

Flachsmarktstraße 8

D-32825 Blomberg

+49 52 35/3-1 20 00

info@phoenixcontact.de