

Crimping pliers - CRIMPFOX 6

1212034

<https://www.phoenixcontact.com/de/produkte/1212034>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6.0 mm², lateral entry, trapezoidal crimp

Your advantages

- All ferrules can be optimally crimped with a minimum amount of effort even in the case of large conductor cross sections
- Unlockable pressure lock
- Comprehensive range of crimping pliers
- Consistently high crimping quality
- Marked die stations for precise processing of corresponding cross sections

Crimping pliers - CRIMPFOX 6



1212034

<https://www.phoenixcontact.com/de/produkte/1212034>

Commercial Data

Item number	1212034
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	N2 - Druck.Zubh.+HandWKZ
Product Key	BH3131
Catalog Page	Page 417 (C-3-2019)
GTIN	4046356453813
Weight per Piece (including packing)	444,2 g
Weight per Piece (excluding packing)	444,2 g
Customs tariff number	82032000
Country of origin	SE

Crimping pliers - CRIMPFOX 6



1212034

<https://www.phoenixcontact.com/de/produkte/1212034>

Technical Data

Notes

Environmental Product Compliance

California Proposition 65	Further information on California's prop. 65 is available under "Downloads" in the manufacturer's declaration
---------------------------	---

Product properties

Product type	Crimping tool
Compression	Trapezoidal crimp

Crimping position 1

Min. cross section	0.25 mm ²
Max. cross section	0.75 mm ²
AWG min	24
AWG max	20

Crimping position 1

Min. cross section	1 mm ²
Max. cross section	1.5 mm ²
AWG min	18
AWG max	16

Crimping position 1

Max. cross section	2.5 mm ²
AWG max	14

Crimping position 1

Max. cross section	4 mm ²
AWG max	12

Crimping position 1

Max. cross section	6 mm ²
AWG max	10

Connection data

Conductor connection

Cross section range, metric	0.25 mm ² ... 6 mm ²
Cross section range AWG	24 ... 10

Dimensions

Width	18 mm
Height	59 mm
Length	198 mm

Crimping pliers - CRIMPFOX 6

1212034

<https://www.phoenixcontact.com/de/produkte/1212034>



Material specifications

Color	black
-------	-------

Crimping pliers - CRIMPFOX 6


1212034

<https://www.phoenixcontact.com/de/produkte/1212034>



Drawings

Product drawing

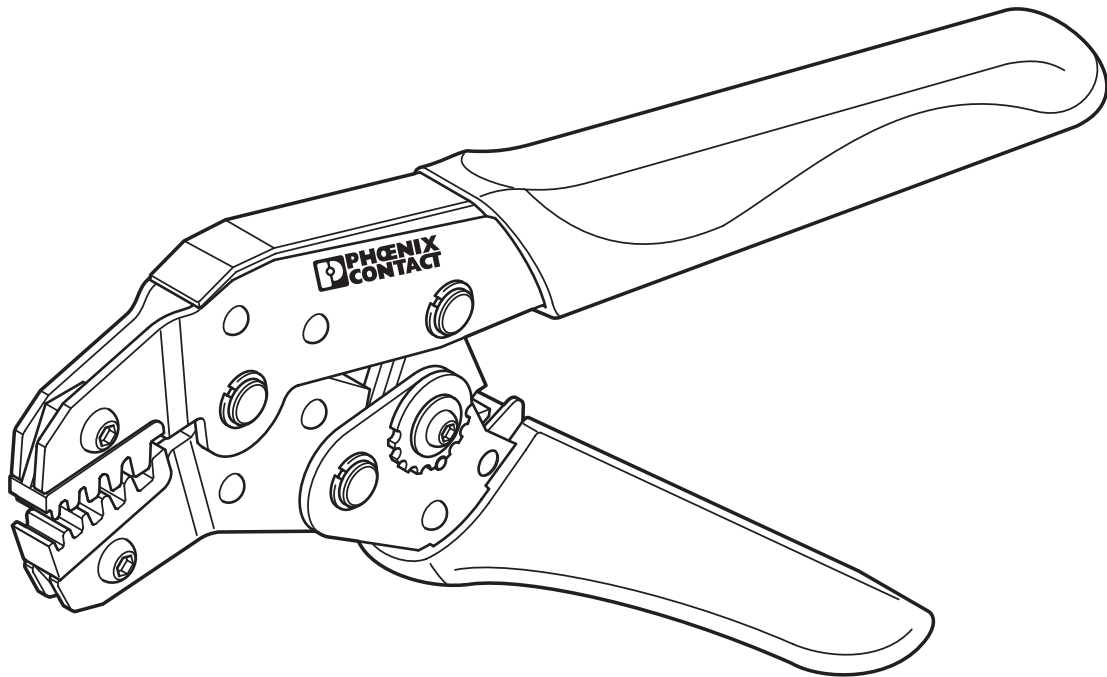

Crimping pliers - CRIMPFOX 6

1212034

<https://www.phoenixcontact.com/de/produkte/1212034>



Approvals



EAC

Approval ID: RU x-DE.xx08.B.02974

Crimping pliers - CRIMPFOX 6



1212034

<https://www.phoenixcontact.com/de/produkte/1212034>

Classifications

ECLASS

ECLASS-9.0	21043811
ECLASS-11.0	21043811
ECLASS-10.0.1	21043811

ETIM

ETIM 8.0	EC000168
----------	----------

UNSPSC

UNSPSC 21.0	27111500
-------------	----------

Crimping pliers - CRIMPFOX 6

1212034

<https://www.phoenixcontact.com/de/produkte/1212034>



Accessories

Replacement die

Replacement die - CRIMPFOX 6/DIE - 1212035

<https://www.phoenixcontact.com/de/produkte/1212035>

Spare die for CRIMPFOX 6



Replacement spring

Replacement spring - CRIMPFOX/ SPR-3 - 1212036

<https://www.phoenixcontact.com/de/produkte/1212036>

Spare recuperating spring



Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH

Flachsmarktstraße 8

D-32825 Blomberg

+49 52 35/3-1 20 00

info@phoenixcontact.de