


Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Fuse modular terminal block, fuse type: Flat, fuse type: C, nom. voltage: 400 V, nominal current: 30 A, connection method: Spring-cage connection, 1 level, Rated cross section: 4 mm², cross section: 0.08 mm²- 6 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- Versions with LED for indicating that a fuse has blown
- The ST 4-FSI/C fuse terminal block accommodates flat-type fuses according to ISO/DIS 8820/DIN 72581-3 or the TCP .../DC32V thermal miniature circuit breaker as the fuse element

Fuse modular terminal block - ST 4-FSI/C



3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Commercial Data

Item number	3036372
Packing unit	50 pc
Minimum order quantity	1 pc
Sales Key	A1 - Reihenklennen
Product Key	BE2136
Catalog Page	Page 231 (C-1-2019)
GTIN	4017918890445
Weight per Piece (including packing)	20,76 g
Weight per Piece (excluding packing)	19,613 g
Customs tariff number	85369095
Country of origin	TR

Fuse modular terminal block - ST 4-FSI/C



3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Technical Data

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Flat
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W
Fuse	C
Maximum current with single arrangement	30 A

Connection data

Number of connections per level	2
Nominal cross section	4 mm ²

1 level

Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A4
Conductor cross section solid	0.08 mm ² ... 6 mm ²
Cross section AWG	28 ... 10
Conductor cross section flexible	0.08 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	28 ... 12
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.14 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1 mm ²
Nominal current	30 A
Maximum load current	30 A
Nominal voltage	400 V
Nominal cross section	4 mm ²

Dimensions

Width	8.2 mm
Height NS 35/15	51 mm
Height NS 35/7,5	43.5 mm
Length	86.5 mm

Fuse modular terminal block - ST 4-FSI/C



3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

Fuse modular terminal block - ST 4-FSI/C


3036372

<https://www.phoenixcontact.com/de/produkte/3036372>



Drawings

Circuit diagram

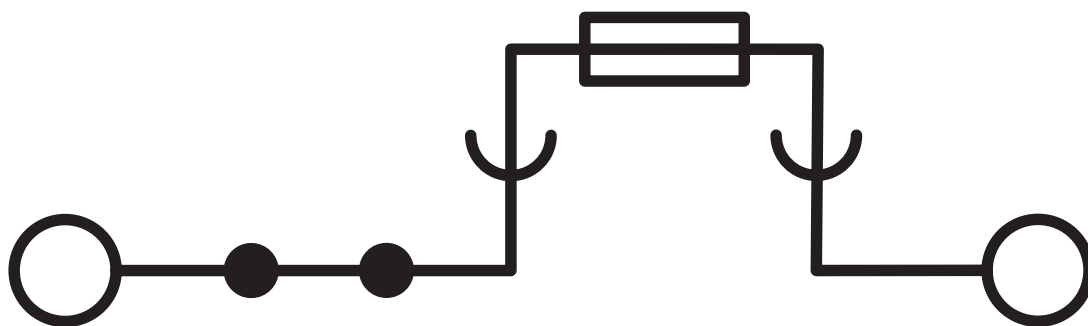

Fuse modular terminal block - ST 4-FSI/C



3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Approvals

DNV

Approval ID: TAE0000382



CSA

Approval ID: 13631

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B				
	300 V	10 A	28 - 10	-
Use group C				
	300 V	10 A	28 - 10	-



EAC

Approval ID: RU C-DE.BL08.B.00644



cULus Recognized

Approval ID: E60425

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B				
	300 V	30 A	28 - 10	-
Use group C				
	300 V	30 A	28 - 10	-
Use group D				
	600 V	5 A	28 - 10	-



RS

Approval ID: 17.00013.272

Fuse modular terminal block - ST 4-FSI/C



3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Classifications

ECLASS

ECLASS-9.0	27141116
ECLASS-10.0.1	27141116
ECLASS-11.0	27141116

ETIM

ETIM 8.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Fuse modular terminal block - ST 4-FSI/C



3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Accessories

 Note: Applying some accessories below might limit this product.


Plug-in bridge

Plug-in bridge - FBS 2-8 - 3030284

<https://www.phoenixcontact.com/de/produkte/3030284>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 41 A

Plug-in bridge

Plug-in bridge - FBS 3-8 - 3030297

<https://www.phoenixcontact.com/de/produkte/3030297>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Plug-in bridge

Plug-in bridge - FBS 4-8 - 3030307

<https://www.phoenixcontact.com/de/produkte/3030307>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 41 A

Plug-in bridge

Plug-in bridge - FBS 5-8 - 3030310

<https://www.phoenixcontact.com/de/produkte/3030310>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>


Plug-in bridge

Plug-in bridge - FBS 6-8 - 3032470

<https://www.phoenixcontact.com/de/produkte/3032470>

Plug-in bridge, pitch: 8.2 mm, color: red



 Max. current carrying capacity: 41 A


Plug-in bridge

Plug-in bridge - FBS 10-8 - 3030323

<https://www.phoenixcontact.com/de/produkte/3030323>

Plug-in bridge, pitch: 8.2 mm, color: red



 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>


Plug-in bridge

Plug-in bridge - FBS 2-8 CT - 3033830

<https://www.phoenixcontact.com/de/produkte/3033830>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 41 A


Plug-in bridge

Plug-in bridge - FBS 3-8 CT - 3033831

<https://www.phoenixcontact.com/de/produkte/3033831>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>


Plug-in bridge

Plug-in bridge - FBS 4-8 CT - 3033832

<https://www.phoenixcontact.com/de/produkte/3033832>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 41 A


Plug-in bridge

Plug-in bridge - FBS 10-8 CT - 3033833

<https://www.phoenixcontact.com/de/produkte/3033833>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>


Plug-in bridge

Plug-in bridge - FBS 2-8 BU - 3032567

<https://www.phoenixcontact.com/de/produkte/3032567>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A


Plug-in bridge

Plug-in bridge - FBS 3-8 BU - 3032570

<https://www.phoenixcontact.com/de/produkte/3032570>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>




Plug-in bridge

Plug-in bridge - FBS 4-8 BU - 3032583

<https://www.phoenixcontact.com/de/produkte/3032583>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A


Plug-in bridge

Plug-in bridge - FBS 5-8 BU - 3032596

<https://www.phoenixcontact.com/de/produkte/3032596>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Plug-in bridge

Plug-in bridge - FBS 6-8 BU - 3032677

<https://www.phoenixcontact.com/de/produkte/3032677>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A


Plug-in bridge

Plug-in bridge - FBS 10-8 BU - 3032606

<https://www.phoenixcontact.com/de/produkte/3032606>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>


Plug-in bridge

Plug-in bridge - FBS 2-8 GY - 3032621

<https://www.phoenixcontact.com/de/produkte/3032621>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 41 A

Plug-in bridge

Plug-in bridge - FBS 3-8 GY - 3032622

<https://www.phoenixcontact.com/de/produkte/3032622>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>



Plug-in bridge

Plug-in bridge - FBS 4-8 GY - 3032635

<https://www.phoenixcontact.com/de/produkte/3032635>

Plug-in bridge, pitch: 8.2 mm, color: gray



 Max. current carrying capacity: 41 A

Plug-in bridge

Plug-in bridge - FBS 5-8 GY - 3032648

<https://www.phoenixcontact.com/de/produkte/3032648>

Plug-in bridge, pitch: 8.2 mm, color: gray



 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>


Plug-in bridge

Plug-in bridge - FBS 6-8 GY - 3032664

<https://www.phoenixcontact.com/de/produkte/3032664>

Plug-in bridge, pitch: 8.2 mm, color: gray



 Max. current carrying capacity: 41 A


Plug-in bridge

Plug-in bridge - FBS 10-8 GY - 3032651

<https://www.phoenixcontact.com/de/produkte/3032651>

Plug-in bridge, pitch: 8.2 mm, color: gray



 Max. current carrying capacity: 41 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Plug-in bridge

Plug-in bridge - FBSR 2-8 - 3033808

<https://www.phoenixcontact.com/de/produkte/3033808>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

Plug-in bridge

Plug-in bridge - FBSR 3-8 - 3001597

<https://www.phoenixcontact.com/de/produkte/3001597>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Plug-in bridge

Plug-in bridge - FBSR 4-8 - 3000585

<https://www.phoenixcontact.com/de/produkte/3000585>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A


Plug-in bridge

Plug-in bridge - FBSR 5-8 - 3033809

<https://www.phoenixcontact.com/de/produkte/3033809>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>



Plug-in bridge

Plug-in bridge - FBSR 10-8 - 3001599

<https://www.phoenixcontact.com/de/produkte/3001599>




Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A


Plug-in bridge

Plug-in bridge - FBSR 16-8 - 3033816

<https://www.phoenixcontact.com/de/produkte/3033816>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Plug-in bridge

Plug-in bridge - FBSR 1/6/11/14-8 - 3033822

<https://www.phoenixcontact.com/de/produkte/3033822>



Plug-in bridge, non-adjacent, pitch: 8.2 mm, pin assignment: 1, 6, 11, 14, color: red

 Max. current carrying capacity: 32 A

Plug-in bridge

Plug-in bridge - FBSR 1/6/11/16-8 - 3033820

<https://www.phoenixcontact.com/de/produkte/3033820>



Plug-in bridge, non-adjacent, pitch: 8.2 mm, pin assignment: 1, 6, 11, 16, color: red

 Max. current carrying capacity: 32 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>


Plug-in bridge

Plug-in bridge - FBSR 1/7/13/16-8 - 3033821

<https://www.phoenixcontact.com/de/produkte/3033821>



Plug-in bridge, non-adjacent, pitch: 8.2 mm, pin assignment: 1, 7, 13, 16, color: red

 Max. current carrying capacity: 32 A

Short-circuit connector

Short-circuit connector - FBSRH 2-8 - 3033802

<https://www.phoenixcontact.com/de/produkte/3033802>



Short-circuit connector, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Short-circuit connector

Short-circuit connector - FBSRH 3-8 - 3033803

<https://www.phoenixcontact.com/de/produkte/3033803>



Short-circuit connector, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

Short-circuit connector

Short-circuit connector - FBSRH 4-8 - 3033804

<https://www.phoenixcontact.com/de/produkte/3033804>



Short-circuit connector, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Screwdriver

Screwdriver - SZF 1-0,6X3,5 - 1204517

<https://www.phoenixcontact.com/de/produkte/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733

<https://www.phoenixcontact.com/de/produkte/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Mounting material

Mounting material - ST-IL - 3039900

<https://www.phoenixcontact.com/de/produkte/3039900>

Operating decal for the ST terminal block



DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681

<https://www.phoenixcontact.com/de/produkte/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Actuation tool

Actuation tool - ST-BW - 1207608

<https://www.phoenixcontact.com/de/produkte/1207608>

Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages



DIN rail perforated

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119

<https://www.phoenixcontact.com/de/produkte/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 0,1A - 0712107

<https://www.phoenixcontact.com/de/produkte/0712107>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - 1204122

<https://www.phoenixcontact.com/de/produkte/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 0,25A - 0712123

<https://www.phoenixcontact.com/de/produkte/0712123>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704

<https://www.phoenixcontact.com/de/produkte/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 0,5A - 0712152

<https://www.phoenixcontact.com/de/produkte/0712152>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421

<https://www.phoenixcontact.com/de/produkte/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 1A - 0712194

<https://www.phoenixcontact.com/de/produkte/0712194>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434

<https://www.phoenixcontact.com/de/produkte/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 2A - 0712217

<https://www.phoenixcontact.com/de/produkte/0712217>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - 0801762

<https://www.phoenixcontact.com/de/produkte/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 3A - 0712233

<https://www.phoenixcontact.com/de/produkte/0712233>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

End cap

End cap - NS 35/ 7,5 CAP - 1206560

<https://www.phoenixcontact.com/de/produkte/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 4A - 0712259

<https://www.phoenixcontact.com/de/produkte/0712259>




Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Zack marker strip

Zack marker strip - ZB 8:UNBEDRUCKT - 1052002

<https://www.phoenixcontact.com/de/produkte/1052002>



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 6A - 0712275

<https://www.phoenixcontact.com/de/produkte/0712275>




Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Zack marker strip

Zack marker strip - ZB 8 CUS - 0825011

<https://www.phoenixcontact.com/de/produkte/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 8A - 0712291

<https://www.phoenixcontact.com/de/produkte/0712291>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Marker for terminal blocks

Marker for terminal blocks - UC-TM 8 - 0818072

<https://www.phoenixcontact.com/de/produkte/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 10A - 0712314

<https://www.phoenixcontact.com/de/produkte/0712314>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Marker for terminal blocks

Marker for terminal blocks - UC-TM 8 CUS - 0824597

<https://www.phoenixcontact.com/de/produkte/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 5/DC32V - 0700005

<https://www.phoenixcontact.com/de/produkte/0700005>



Thermal device circuit breaker, number of positions: 1, nominal current: 5 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: light brown

Marker for terminal blocks

Marker for terminal blocks - UCT-TM 8 - 0828740

<https://www.phoenixcontact.com/de/produkte/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 7,5/DC32V - 0700007

<https://www.phoenixcontact.com/de/produkte/0700007>



Thermal device circuit breaker, number of positions: 1, nominal current: 7.5 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: brown

Marker for terminal blocks

Marker for terminal blocks - UCT-TM 8 CUS - 0829616

<https://www.phoenixcontact.com/de/produkte/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 10/DC32V - 0700010

<https://www.phoenixcontact.com/de/produkte/0700010>




Thermal device circuit breaker, number of positions: 1, nominal current: 10 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: red

Zack marker strip

Zack marker strip - ZB 8,LGS:FORTL.ZAHLEN - 1052015

<https://www.phoenixcontact.com/de/produkte/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 15/DC32V - 0700015

<https://www.phoenixcontact.com/de/produkte/0700015>




Thermal device circuit breaker, number of positions: 1, nominal current: 15 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: blue

Zack marker strip

Zack marker strip - ZB 8,QR:FORTL.ZAHLEN - 1052028

<https://www.phoenixcontact.com/de/produkte/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 20/DC32V - 0700020

<https://www.phoenixcontact.com/de/produkte/0700020>




Thermal device circuit breaker, number of positions: 1, nominal current: 20 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: yellow

Marker for terminal blocks

Marker for terminal blocks - ZB 8,LGS:L1-N,PE - 1052413

<https://www.phoenixcontact.com/de/produkte/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 25/DC32V - 0700025

<https://www.phoenixcontact.com/de/produkte/0700025>



Thermal device circuit breaker, number of positions: 1, nominal current: 25 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: white

Zack Marker strip, flat

Zack Marker strip, flat - ZBF 8:UNBEDRUCKT - 0808781

<https://www.phoenixcontact.com/de/produkte/0808781>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 30/DC32V - 0700030

<https://www.phoenixcontact.com/de/produkte/0700030>



Thermal device circuit breaker, number of positions: 1, nominal current: 30 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: light green

Zack Marker strip, flat

Zack Marker strip, flat - ZBF 8 CUS - 0825030

<https://www.phoenixcontact.com/de/produkte/0825030>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Zack Marker strip, flat

Zack Marker strip, flat - ZBF 8,LGS:FORTL.ZAHLEN - 0808804

<https://www.phoenixcontact.com/de/produkte/0808804>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 101 ... 110, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

Marker for terminal blocks

Marker for terminal blocks - UC-TMF 8 - 0818137

<https://www.phoenixcontact.com/de/produkte/0818137>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Marker for terminal blocks

Marker for terminal blocks - UC-TMF 8 CUS - 0824654

<https://www.phoenixcontact.com/de/produkte/0824654>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

Marker for terminal blocks

Marker for terminal blocks - UCT-TMF 8 - 0828748

<https://www.phoenixcontact.com/de/produkte/0828748>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Marker for terminal blocks

Marker for terminal blocks - UCT-TMF 8 CUS - 0829672

<https://www.phoenixcontact.com/de/produkte/0829672>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

Test plugs

Test plugs - MPS-MT - 0201744

<https://www.phoenixcontact.com/de/produkte/0201744>



Test plugs, with solder connection up to 1 mm² conductor cross section, color: gray

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663

<https://www.phoenixcontact.com/de/produkte/0201663>

Insulating sleeve, color: white



Insulating sleeve

Insulating sleeve - MPS-IH RD - 0201676

<https://www.phoenixcontact.com/de/produkte/0201676>

Insulating sleeve, color: red



Fuse modular terminal block - ST 4-FSI/C

3036372


<https://www.phoenixcontact.com/de/produkte/3036372>

Insulating sleeve

Insulating sleeve - MPS-IH BU - 0201689

<https://www.phoenixcontact.com/de/produkte/0201689>

Insulating sleeve, color: blue



Insulating sleeve

Insulating sleeve - MPS-IH YE - 0201692

<https://www.phoenixcontact.com/de/produkte/0201692>

Insulating sleeve, color: yellow



Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Insulating sleeve

Insulating sleeve - MPS-IH GN - 0201702

<https://www.phoenixcontact.com/de/produkte/0201702>

Insulating sleeve, color: green



Insulating sleeve

Insulating sleeve - MPS-IH GY - 0201728

<https://www.phoenixcontact.com/de/produkte/0201728>

Insulating sleeve, color: gray



Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Insulating sleeve

Insulating sleeve - MPS-IH BK - 0201731

<https://www.phoenixcontact.com/de/produkte/0201731>

Insulating sleeve, color: black



Insulating sleeve

Insulating sleeve - ISH 4/0,5 - 3002885

<https://www.phoenixcontact.com/de/produkte/3002885>

Insulating sleeve, color: gray



Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>



Insulating sleeve

Insulating sleeve - ISH 4/1,0 - 3002898

<https://www.phoenixcontact.com/de/produkte/3002898>



Insulating sleeve, color: black

Test plugs

Test plugs - PS-6 - 3030996

<https://www.phoenixcontact.com/de/produkte/3030996>



Test plugs, Modular test plug, color: red

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Test plugs

Test plugs - PS-6/2,3MM RD - 3038736

<https://www.phoenixcontact.com/de/produkte/3038736>



Test plugs, color: red

Test adapter

Test adapter - PAI-4-FIX BU - 3032729

<https://www.phoenixcontact.com/de/produkte/3032729>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: blue

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Test adapter

Test adapter - PAI-4-FIX OG - 3034455

<https://www.phoenixcontact.com/de/produkte/3034455>



4 mm test adapter, for terminal blocks with 8.2 mm pitch

Test adapter

Test adapter - PAI-4-FIX YE - 3032745

<https://www.phoenixcontact.com/de/produkte/3032745>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: yellow

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Test adapter

Test adapter - PAI-4-FIX RD - 3032732

<https://www.phoenixcontact.com/de/produkte/3032732>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: red

Test adapter

Test adapter - PAI-4-FIX GN - 3032758

<https://www.phoenixcontact.com/de/produkte/3032758>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: green

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Test adapter

Test adapter - PAI-4-FIX BK - 3032774

<https://www.phoenixcontact.com/de/produkte/3032774>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: black

Test adapter

Test adapter - PAI-4-FIX GY - 3032790

<https://www.phoenixcontact.com/de/produkte/3032790>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: gray

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Test adapter

Test adapter - PAI-4-FIX VT - 3032761

<https://www.phoenixcontact.com/de/produkte/3032761>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 4.2 mm .. 8.2 mm pitch, color: violet

Test adapter

Test adapter - PAI-4-FIX BN - 3032787

<https://www.phoenixcontact.com/de/produkte/3032787>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: brown

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Test adapter

Test adapter - PAI-4-FIX WH - 3032797

<https://www.phoenixcontact.com/de/produkte/3032797>



4 mm test adapter, for terminal blocks with 8.2 mm pitch

Test adapter

Test adapter - PAIS-4-FIX GY - 3032791

<https://www.phoenixcontact.com/de/produkte/3032791>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: gray

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Test adapter

Test adapter - PAIS-4-FIX BK - 3032792

<https://www.phoenixcontact.com/de/produkte/3032792>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: black

Test adapter

Test adapter - PAIS-4-FIX RD - 3032793

<https://www.phoenixcontact.com/de/produkte/3032793>



Test adapter, Do not plug in while the power is connected, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: red

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Test adapter

Test adapter - PAIS-4-FIX BU - 3032798

<https://www.phoenixcontact.com/de/produkte/3032798>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: blue

Test adapter

Test adapter - PAIS-4-FIX YE - 3032799

<https://www.phoenixcontact.com/de/produkte/3032799>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: yellow

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

Test adapter

Test adapter - PAIS-4-FIX GN - 3032801

<https://www.phoenixcontact.com/de/produkte/3032801>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: green

Test adapter

Test adapter - PAIS-4-FIX VT - 3032802

<https://www.phoenixcontact.com/de/produkte/3032802>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: violet

Fuse modular terminal block - ST 4-FSI/C

3036372

<https://www.phoenixcontact.com/de/produkte/3036372>

End clamp

End clamp - E/AL-NS 35 - 1201662

<https://www.phoenixcontact.com/de/produkte/1201662>



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH

Flachsmarktstraße 8

D-32825 Blomberg

+49 52 35/3-1 20 00

info@phoenixcontact.de