

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

---



Flat-type fuse terminal block, cross section: 0.2 - 6 mm<sup>2</sup>, AWG: 26 - 8, width: 8.2 mm, color: black

---

## Your advantages

- Can be bridged with FBI ... fixed bridge
- For the use of KFZ flat-type fuses from the FSI/C series

# Fuse modular terminal block - UK 6-FSI/C



3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Commercial Data

Item number	3118203
Packing unit	50 pc
Minimum order quantity	1 pc
Sales Key	A1 - Reihenklennen
Product Key	BE1236
Catalog Page	Page 499 (C-1-2019)
GTIN	4017918100605
Weight per Piece (including packing)	20,79 g
Weight per Piece (excluding packing)	19,5 g
Customs tariff number	85369095
Country of origin	TR

## Technical Data

### Product properties

Product type	Fuse terminal block
Number of positions	1
Number of connections	2
Number of rows	1
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Fuse type	Flat
Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	1.31 W
Fuse	C
Maximum current with single arrangement	30 A (special arrangements on request)

### Connection data

Number of connections per level	2
Nominal cross section	6 mm <sup>2</sup>

#### 1 level

Screw thread	M4
Tightening torque	1.5 ... 1.6 Nm
Stripping length	10 mm
Internal cylindrical gage	A5
Conductor cross section solid	0.2 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Cross section AWG	24 ... 8
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	24 ... 10
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.25 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with same cross section, solid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with same cross section, flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Nominal current	30 A
Maximum load current	30 A
Nominal voltage	250 V

# Fuse modular terminal block - UK 6-FSI/C



3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

Nominal cross section	4 mm <sup>2</sup>
-----------------------	-------------------

## Dimensions

Width	8.2 mm
Height	52.6 mm
Height NS 35/15	61.3 mm
Height NS 35/7,5	53.8 mm
Height	2.047 "
Height NS 32	58.8 mm
Length	64 mm

## Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

# Fuse modular terminal block - UK 6-FSI/C



3118203

<https://www.phoenixcontact.com/de/produkte/3118203>


Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

## Drawings


Circuit diagram

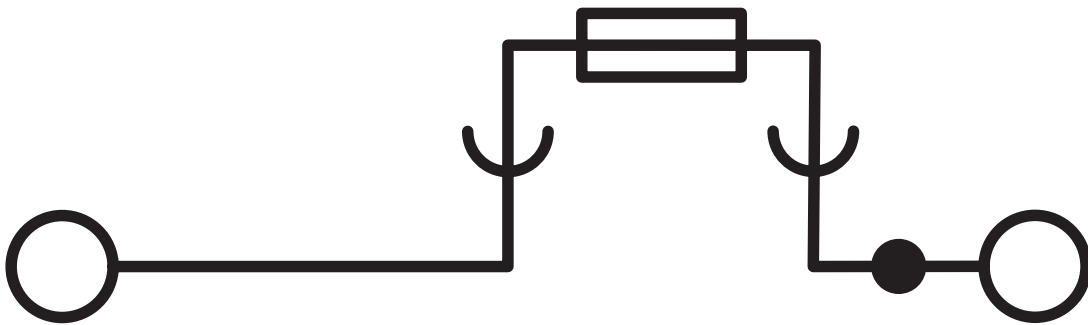

Diagram

Derating curve UK 6-FSI/C (single arrangement)

- ① = Fuse insert 10 A
- ② = Fuse insert 20 A
- ③ = Fuse insert 30 A

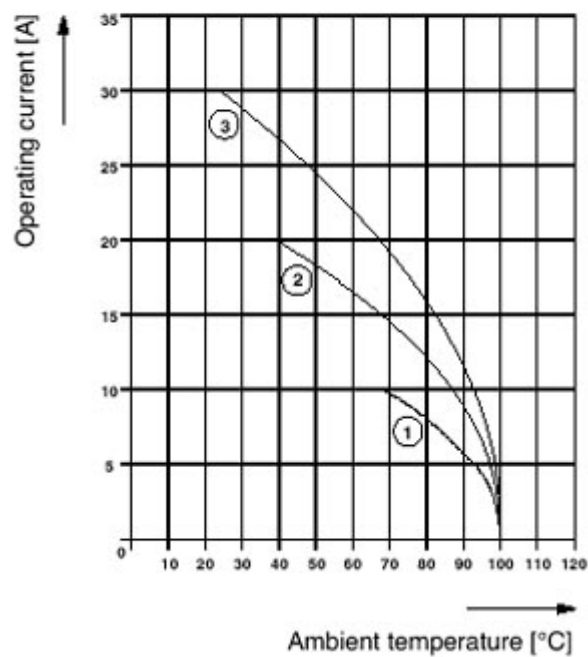


# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>



Circuit diagram

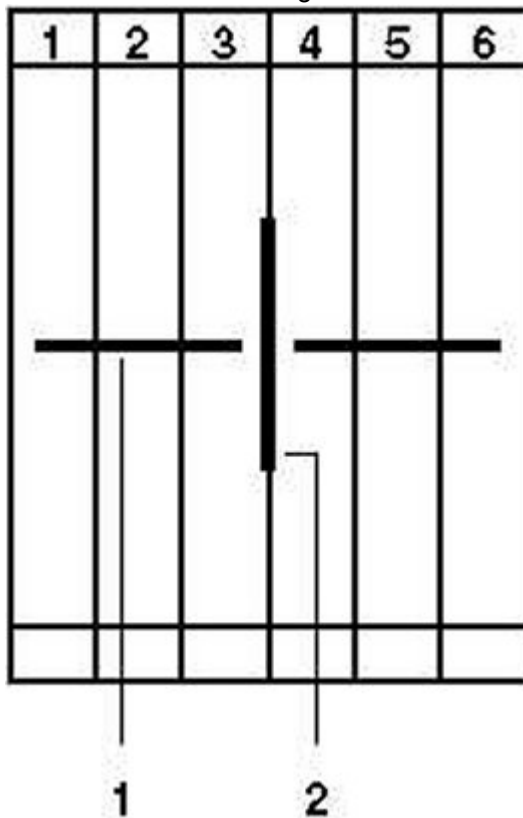

1 = fixed bridge  
2 = separating plate


# Fuse modular terminal block - UK 6-FSI/C





3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Approvals

 <b>CSA</b> Approval ID: 13631				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$
	32 V	30 A	26 - 8	-

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00534				
---	--	--	--	--

 <b>cULus Recognized</b> Approval ID: E60425				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$
Use group B	300 V	30 A	26 - 8	-
Use group C	300 V	30 A	26 - 8	-
Use group F	250 V	30 A	26 - 8	-
Use group D	600 V	5 A	26 - 8	-



# Fuse modular terminal block - UK 6-FSI/C



3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Classifications

### ECLASS

ECLASS-9.0	27141116
ECLASS-10.0.1	27141116
ECLASS-11.0	27141116

### ETIM

ETIM 8.0	EC000899
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# Fuse modular terminal block - UK 6-FSI/C



3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Accessories

 Note: Applying some accessories below might limit this product.


### Fixed bridge

Fixed bridge - FBI 2- 8 - 0200020

<https://www.phoenixcontact.com/de/produkte/0200020>



Fixed bridge, pitch: 8 mm, color: silver

 Max. current carrying capacity: 34 A

---

### Fixed bridge

Fixed bridge - FBI 3- 8 - 0200059

<https://www.phoenixcontact.com/de/produkte/0200059>



Fixed bridge, pitch: 8 mm, color: silver

 Max. current carrying capacity: 34 A

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>


## Fixed bridge

Fixed bridge - FBI 4- 8 - 0200046

<https://www.phoenixcontact.com/de/produkte/0200046>

Fixed bridge, pitch: 8 mm, color: silver



 Max. current carrying capacity: 34 A

---

## Fixed bridge

Fixed bridge - FBI 10- 8 - 0203263

<https://www.phoenixcontact.com/de/produkte/0203263>

Fixed bridge, pitch: 8 mm, color: silver



 Max. current carrying capacity: 34 A

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>


## Insertion bridge

Insertion bridge - EB 2- 8 - 0202154

<https://www.phoenixcontact.com/de/produkte/0202154>



Insertion bridge, pitch: 8 mm, color: gray

 Max. current carrying capacity: 57 A

---

## Insertion bridge

Insertion bridge - EB 3- 8 - 0202141

<https://www.phoenixcontact.com/de/produkte/0202141>



Insertion bridge, pitch: 8 mm, color: gray

 Max. current carrying capacity: 57 A

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>





## Insertion bridge

Insertion bridge - EB 10- 8 - 0202138

<https://www.phoenixcontact.com/de/produkte/0202138>

Insertion bridge, pitch: 8 mm, color: gray



 Max. current carrying capacity: 57 A

---


## Bridge

Bridge - ISSBI 10- 8 - 0301534

<https://www.phoenixcontact.com/de/produkte/0301534>

Bridge, pitch: 8 mm, color: silver



 Max. current carrying capacity: 38 A

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>


## Insertion bridge

Insertion bridge - EB 4- 8 - 0202142

<https://www.phoenixcontact.com/de/produkte/0202142>

Insertion bridge, pitch: 8 mm, color: gray



 Max. current carrying capacity: 41 A


---


## Insertion bridge

Insertion bridge - EB 1/3/5/7-8 - 3072340

<https://www.phoenixcontact.com/de/produkte/3072340>

Insertion bridge, pitch: 16.4 mm, pin assignment: 1, 3, 5, 7, color: gray



 Max. current carrying capacity: 41 A

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>


## Insertion bridge

Insertion bridge - EB 1/3/5-8 - 3072341

<https://www.phoenixcontact.com/de/produkte/3072341>

Insertion bridge, pitch: 16.4 mm, pin assignment: 1,3,5, color: gray



 Max. current carrying capacity: 41 A

---

## Separating plate

Separating plate - TS-KK 3 - 2770215

<https://www.phoenixcontact.com/de/produkte/2770215>

Separating plate, length: 14 mm, width: 0.5 mm, height: 16 mm, color: gray





# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## DIN rail perforated

DIN rail perforated - NS 32 PERF 2000MM-VPE 10 - 1201002

<https://www.phoenixcontact.com/de/produkte/1201002>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 32 UNPERF 2000MM-VPE 10 - 1201015

<https://www.phoenixcontact.com/de/produkte/1201015>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 0,1A - 0712107

<https://www.phoenixcontact.com/de/produkte/0712107>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

---

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733

<https://www.phoenixcontact.com/de/produkte/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 0,25A - 0712123

<https://www.phoenixcontact.com/de/produkte/0712123>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681

<https://www.phoenixcontact.com/de/produkte/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 0,5A - 0712152

<https://www.phoenixcontact.com/de/produkte/0712152>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

---

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119

<https://www.phoenixcontact.com/de/produkte/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 1A - 0712194

<https://www.phoenixcontact.com/de/produkte/0712194>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - 1204122

<https://www.phoenixcontact.com/de/produkte/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 2A - 0712217

<https://www.phoenixcontact.com/de/produkte/0712217>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704

<https://www.phoenixcontact.com/de/produkte/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 3A - 0712233

<https://www.phoenixcontact.com/de/produkte/0712233>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

---

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421

<https://www.phoenixcontact.com/de/produkte/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 4A - 0712259

<https://www.phoenixcontact.com/de/produkte/0712259>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434

<https://www.phoenixcontact.com/de/produkte/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)



# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 6A - 0712275

<https://www.phoenixcontact.com/de/produkte/0712275>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - 0801762

<https://www.phoenixcontact.com/de/produkte/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 8A - 0712291

<https://www.phoenixcontact.com/de/produkte/0712291>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

---

## End cap

End cap - NS 35/ 7,5 CAP - 1206560

<https://www.phoenixcontact.com/de/produkte/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 10A - 0712314

<https://www.phoenixcontact.com/de/produkte/0712314>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

---

## DIN rail perforated

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730

<https://www.phoenixcontact.com/de/produkte/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 5/DC32V - 0700005

<https://www.phoenixcontact.com/de/produkte/0700005>



Thermal device circuit breaker, number of positions: 1, nominal current: 5 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: light brown

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714

<https://www.phoenixcontact.com/de/produkte/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 7,5/DC32V - 0700007

<https://www.phoenixcontact.com/de/produkte/0700007>



Thermal device circuit breaker, number of positions: 1, nominal current: 7.5 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: brown

---

## DIN rail perforated

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602

<https://www.phoenixcontact.com/de/produkte/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 10/DC32V - 0700010

<https://www.phoenixcontact.com/de/produkte/0700010>



Thermal device circuit breaker, number of positions: 1, nominal current: 10 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: red

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 WH UNPERF 2000MM-VPE 10 - 1204135

<https://www.phoenixcontact.com/de/produkte/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 15/DC32V - 0700015

<https://www.phoenixcontact.com/de/produkte/0700015>



Thermal device circuit breaker, number of positions: 1, nominal current: 15 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: blue

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756

<https://www.phoenixcontact.com/de/produkte/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 20/DC32V - 0700020

<https://www.phoenixcontact.com/de/produkte/0700020>



Thermal device circuit breaker, number of positions: 1, nominal current: 20 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: yellow

---

## DIN rail perforated

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599

<https://www.phoenixcontact.com/de/produkte/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)



# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 25/DC32V - 0700025

<https://www.phoenixcontact.com/de/produkte/0700025>



Thermal device circuit breaker, number of positions: 1, nominal current: 25 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: white

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586

<https://www.phoenixcontact.com/de/produkte/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Thermal device circuit breaker

Thermal device circuit breaker - TCP 30/DC32V - 0700030

<https://www.phoenixcontact.com/de/produkte/0700030>



Thermal device circuit breaker, number of positions: 1, nominal current: 30 A, nom. voltage: 32 V, width: 6 mm, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: light green

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM-VPE 10 - 1201895

<https://www.phoenixcontact.com/de/produkte/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## End cap

End cap - NS 35/15 CAP - 1206573

<https://www.phoenixcontact.com/de/produkte/1206573>

DIN rail end piece, for DIN rail NS 35/15



---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM-VPE 10 - 1201798

<https://www.phoenixcontact.com/de/produkte/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

# Fuse modular terminal block - UK 6-FSI/C


3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Zack marker strip

Zack marker strip - ZB 8:UNBEDRUCKT - 1052002

<https://www.phoenixcontact.com/de/produkte/1052002>




Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

## Zack marker strip

Zack marker strip - ZB 8 CUS - 0825011

<https://www.phoenixcontact.com/de/produkte/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Marker for terminal blocks

Marker for terminal blocks - UC-TM 8 - 0818072

<https://www.phoenixcontact.com/de/produkte/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

---

## Marker for terminal blocks

Marker for terminal blocks - UC-TM 8 CUS - 0824597

<https://www.phoenixcontact.com/de/produkte/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Marker for terminal blocks

Marker for terminal blocks - UCT-TM 8 - 0828740

<https://www.phoenixcontact.com/de/produkte/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

---

## Marker for terminal blocks

Marker for terminal blocks - UCT-TM 8 CUS - 0829616

<https://www.phoenixcontact.com/de/produkte/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

# Fuse modular terminal block - UK 6-FSI/C


3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Zack marker strip

Zack marker strip - ZB 8,LGS:FORTL.ZAHLEN - 1052015

<https://www.phoenixcontact.com/de/produkte/1052015>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

---

## Zack marker strip

Zack marker strip - ZB 8,QR:FORTL.ZAHLEN - 1052028

<https://www.phoenixcontact.com/de/produkte/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

# Fuse modular terminal block - UK 6-FSI/C


3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Marker for terminal blocks

Marker for terminal blocks - ZB 8,LGS:L1-N,PE - 1052413

<https://www.phoenixcontact.com/de/produkte/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

## End clamp

End clamp - CLIPFIX 35 - 3022218

<https://www.phoenixcontact.com/de/produkte/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## End clamp

End clamp - CLIPFIX 35-5 - 3022276

<https://www.phoenixcontact.com/de/produkte/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## End clamp

End clamp - E/NS 35 N - 0800886

<https://www.phoenixcontact.com/de/produkte/0800886>



End clamp, width: 9.5 mm, color: gray

# Fuse modular terminal block - UK 6-FSI/C

3118203


<https://www.phoenixcontact.com/de/produkte/3118203>

## End clamp

End clamp - E/UK - 1201442

<https://www.phoenixcontact.com/de/produkte/1201442>

End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35



---

## End clamp

End clamp - E/UK 1 - 1201413

<https://www.phoenixcontact.com/de/produkte/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Fuse

Fuse - SI FORM C 15 A DIN 72581 - 0913676

<https://www.phoenixcontact.com/de/produkte/0913676>



Flat-type plug-in fuse, type C, color code: light blue, nominal current: 15 A

---

## Fuse

Fuse - SI FORM C 2 A - 0913689

<https://www.phoenixcontact.com/de/produkte/0913689>



Flat-type plug-in fuse, type C, color code: gray, nominal current: 2 A

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Fuse

Fuse - SI FORM C 7,5 A DIN 72581 - 0913702

<https://www.phoenixcontact.com/de/produkte/0913702>



Flat-type plug-in fuse, type C, color code: brown, nominal current: 7.5 A

---

## Fuse

Fuse - SI FORM C 20 A DIN 72581 - 0913744

<https://www.phoenixcontact.com/de/produkte/0913744>



Flat-type plug-in fuse, type C, color code: yellow, nominal current: 20 A

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Fuse

Fuse - SI FORM C 4 A DIN 72581 - 0913731

<https://www.phoenixcontact.com/de/produkte/0913731>



Flat-type plug-in fuse, type C, color code: pink, nominal current: 4 A

---

## Fuse

Fuse - SI FORM C 3 A DIN 72581 - 0913773

<https://www.phoenixcontact.com/de/produkte/0913773>



Flat-type plug-in fuse, type C, color code: violet, nominal current: 3 A

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Fuse

Fuse - SI FORM C 30 A DIN 72581 - 0913760

<https://www.phoenixcontact.com/de/produkte/0913760>



Flat-type plug-in fuse, type C, color code: light green, nominal current: 30 A

---

## Fuse

Fuse - SI FORM C 25 A DIN 72581 - 0913757

<https://www.phoenixcontact.com/de/produkte/0913757>



Flat-type plug-in fuse, type C, color code: white, nominal current: 25 A

# Fuse modular terminal block - UK 6-FSI/C

3118203

<https://www.phoenixcontact.com/de/produkte/3118203>

## Fuse

Fuse - SI FORM C 10 A DIN 72581 - 0913715

<https://www.phoenixcontact.com/de/produkte/0913715>



Flat-type plug-in fuse, type C, color code: red, nominal current: 10 A

---

## Fuse

Fuse - SI FORM C 5 A DIN 72581 - 0913692

<https://www.phoenixcontact.com/de/produkte/0913692>



Flat-type plug-in fuse, type C, color code: light brown, nominal current: 5 A

---

Phoenix Contact 2022 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 52 35/3-1 20 00  
[info@phoenixcontact.de](mailto:info@phoenixcontact.de)