


# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

---



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage/plug-in connection, 1st level connection left, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, 1st level connection right, mounting type: NS 35/7,5, NS 35/15, color: gray

---

## Your advantages

- The plug-in ST-COMBI spring-cage terminal block series combines the system advantages of the ST standard terminal block series with those of the COMBI plug-in system
- Tested for railway applications

# Feed-through terminal block - ST 2,5/ 1P



3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Commercial Data

Item number	3040012
Packing unit	50 pc
Minimum order quantity	1 pc
Sales Key	A1 - Reihenklemmen
Product Key	BE2141
Catalog Page	Page 309 (C-1-2019)
GTIN	4017918832612
Weight per Piece (including packing)	5,55 g
Weight per Piece (excluding packing)	5,045 g
Customs tariff number	85369010
Country of origin	DE

# Feed-through terminal block - ST 2,5/ 1P



3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Technical Data

### Product properties

Product type	Plug-in terminal block
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	2
Number of rows	1
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W

### Connection data

Number of connections per level	2
Nominal cross section	2.5 mm <sup>2</sup>

### 1st level connection left


Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A3
Conductor cross section solid	0.08 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Cross section AWG	28 ... 12
Conductor cross section flexible	0.08 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	28 ... 14
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup>
Nominal current	24 A (see derating curve)
Maximum load current	24 A (For 4 mm <sup>2</sup> conductor cross section, see derating curve)
Nominal voltage	500 V
Nominal cross section	2.5 mm <sup>2</sup>

### Dimensions

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

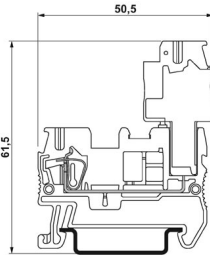Dimensional drawing	
Width	5.2 mm
End cover width	2.2 mm
Height NS 35/15	44 mm
Height NS 35/7,5	36.5 mm
Length	48.5 mm

## Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

### Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed
Short-time withstand current 2.5 mm <sup>2</sup>	0.3 kA
Short-time withstand current 4 mm <sup>2</sup>	0.48 kA
Result	Test passed

### Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

# Feed-through terminal block - ST 2,5/ 1P



3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Mechanical properties

### Mechanical data

Open side panel	Yes
-----------------	-----

## Mechanical tests

### Attachment on the carrier

DIN rail/fixing support	NS 35
Test force setpoint	1 N
Result	Test passed

## Environmental and real-life conditions

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$
ASD level	$0.964 \text{ (m/s}^2\text{)}^2\text{/Hz}$
Acceleration	0.58g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

### Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

### Ambient conditions

Ambient temperature (operation)	-60 °C (max. operating temperature see derating curve)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 61984
----------------------------------	-----------

# Feed-through terminal block - ST 2,5/ 1P



3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

	IEC 61984
--	-----------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

# Feed-through terminal block - ST 2,5/ 1P


3040012

<https://www.phoenixcontact.com/de/produkte/3040012>




## Drawings

Dimensional drawing

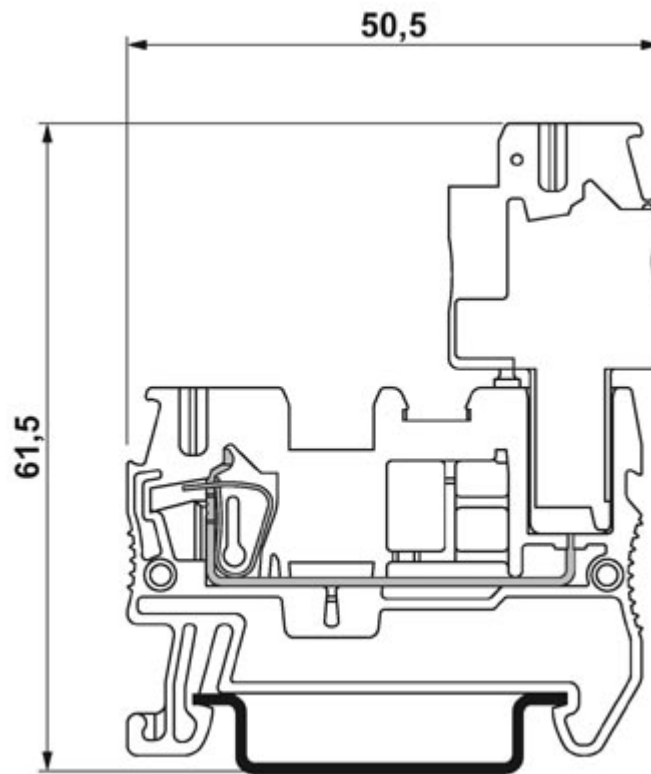


Circuit diagram

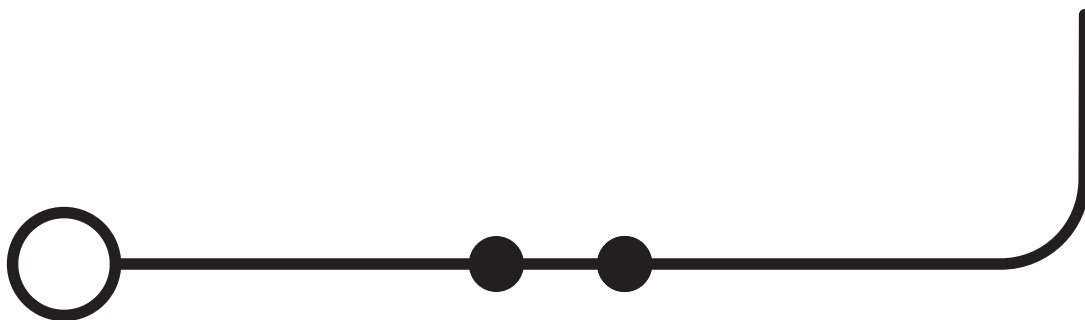

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

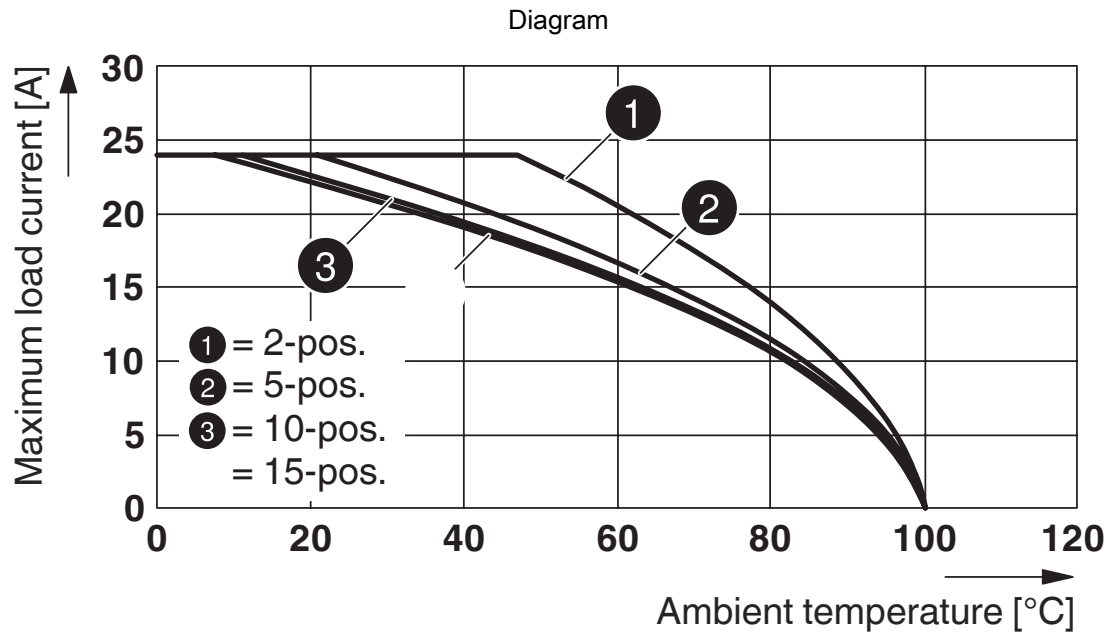

Applies to all male connector variants SP...




# Feed-through terminal block - ST 2,5/ 1P





3040012


<https://www.phoenixcontact.com/de/produkte/3040012>

## Approvals


 <b>CSA</b> Approval ID: 13631				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $mm^2$
Use group B	300 V	20 A	28 - 12	-
Use group C	300 V	20 A	28 - 12	-


 <b>IECEE CB Scheme</b> Approval ID: DE1-62736/B1/B2				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $mm^2$
Current depends on number of positions			-	-


 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00644				
---	--	--	--	--

 <b>LR</b> Approval ID: LR2042068TA				
---	--	--	--	--

 <b>RS</b> Approval ID: 17.00013.272				
--	--	--	--	--

 <b>BV</b> Approval ID: 27721/B0 BV				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $mm^2$
			-	-

 <b>VDE Zeichengenehmigung</b> Approval ID: 40019518				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $mm^2$
Only flexible conductors	500 V		-	0.2 - 2.5
Only rigid conductors	500 V		-	0.2 - 4

 <b>cULus Recognized</b> Approval ID: E60425				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $mm^2$

# Feed-through terminal block - ST 2,5/ 1P



3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

Use group	U <sub>N</sub>	I <sub>N</sub>	AWG	mm <sup>2</sup>
Use group B	300 V	20 A	28 - 12	-
Use group C	300 V	20 A	28 - 12	-
Use group D	600 V	5 A	28 - 12	-

DNV Approval ID: TAE00001CS				
	Nominal Voltage U <sub>N</sub>	Nominal Current I <sub>N</sub>	Cross Section AWG	Cross Section mm <sup>2</sup>
			-	-

# Feed-through terminal block - ST 2,5/ 1P



3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Classifications

### ECLASS

ECLASS-9.0	27141120
ECLASS-10.0.1	27141120
ECLASS-11.0	27141120

### ETIM

ETIM 8.0	EC000897
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# Feed-through terminal block - ST 2,5/ 1P



3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Accessories

 Note: Applying some accessories below might limit this product.


### Plug-in bridge

Plug-in bridge - FBS 2-5 - 3030161

<https://www.phoenixcontact.com/de/produkte/3030161>



Plug-in bridge, pitch: 5.2 mm, color: red

 Max. current carrying capacity: 24 A

---

### Plug-in bridge

Plug-in bridge - FBS 3-5 - 3030174

<https://www.phoenixcontact.com/de/produkte/3030174>



Plug-in bridge, pitch: 5.2 mm, color: red

 Max. current carrying capacity: 24 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>


## Plug-in bridge

Plug-in bridge - FBS 4-5 - 3030187

<https://www.phoenixcontact.com/de/produkte/3030187>

Plug-in bridge, pitch: 5.2 mm, color: red



 Max. current carrying capacity: 24 A

---


## Plug-in bridge

Plug-in bridge - FBS 5-5 - 3030190

<https://www.phoenixcontact.com/de/produkte/3030190>

Plug-in bridge, pitch: 5.2 mm, color: red



 Max. current carrying capacity: 24 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>


## Plug-in bridge

Plug-in bridge - FBS 10-5 - 3030213

<https://www.phoenixcontact.com/de/produkte/3030213>



Plug-in bridge, pitch: 5.2 mm, color: red

 Max. current carrying capacity: 24 A

---


## Plug-in bridge

Plug-in bridge - FBS 20-5 - 3030226

<https://www.phoenixcontact.com/de/produkte/3030226>



Plug-in bridge, pitch: 5.2 mm, color: red

 Max. current carrying capacity: 24 A

---

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>



## Plug-in bridge

Plug-in bridge - FBS 50-5 - 3038930

<https://www.phoenixcontact.com/de/produkte/3038930>



Plug-in bridge, pitch: 5.2 mm, color: red

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 3-5 BU - 3036880

<https://www.phoenixcontact.com/de/produkte/3036880>



Plug-in bridge, pitch: 5.2 mm, color: blue

 Max. current carrying capacity: 24 A



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug-in bridge

Plug-in bridge - FBS 4-5 BU - 3036893

<https://www.phoenixcontact.com/de/produkte/3036893>



Plug-in bridge, pitch: 5.2 mm, color: blue

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 5-5 BU - 3036903

<https://www.phoenixcontact.com/de/produkte/3036903>



Plug-in bridge, pitch: 5.2 mm, color: blue

 Max. current carrying capacity: 24 A

---

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug-in bridge

Plug-in bridge - FBS 10-5 BU - 3036916

<https://www.phoenixcontact.com/de/produkte/3036916>



Plug-in bridge, pitch: 5.2 mm, color: blue

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 20-5 BU - 3036929

<https://www.phoenixcontact.com/de/produkte/3036929>



Plug-in bridge, pitch: 5.2 mm, color: blue

 Max. current carrying capacity: 24 A

---

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug-in bridge

Plug-in bridge - FBS 50-5 BU - 3032114

<https://www.phoenixcontact.com/de/produkte/3032114>



Plug-in bridge, Version with single- or double-sided cutting edge. Please keep in mind the possible impact on touch protection as well as air clearances and creepage distances., pitch: 5.2 mm, color: blue

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 2-5 GY - 3038969

<https://www.phoenixcontact.com/de/produkte/3038969>



Plug-in bridge, pitch: 5.2 mm, color: gray

 Max. current carrying capacity: 24 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>



## Plug-in bridge

Plug-in bridge - FBS 3-5 GY - 3038972

<https://www.phoenixcontact.com/de/produkte/3038972>



Plug-in bridge, pitch: 5.2 mm, color: gray

 Max. current carrying capacity: 24 A

---


## Plug-in bridge

Plug-in bridge - FBS 4-5 GY - 3038985

<https://www.phoenixcontact.com/de/produkte/3038985>



Plug-in bridge, pitch: 5.2 mm, color: gray

 Max. current carrying capacity: 24 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug-in bridge

Plug-in bridge - FBS 5-5 GY - 3038998

<https://www.phoenixcontact.com/de/produkte/3038998>



Plug-in bridge, pitch: 5.2 mm, color: gray

 Max. current carrying capacity: 24 A

---


## Plug-in bridge

Plug-in bridge - FBS 10-5 GY - 3039007

<https://www.phoenixcontact.com/de/produkte/3039007>



Plug-in bridge, pitch: 5.2 mm, color: gray

 Max. current carrying capacity: 24 A

---

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug-in bridge

Plug-in bridge - FBS 20-5 GY - 3038671

<https://www.phoenixcontact.com/de/produkte/3038671>



Plug-in bridge, pitch: 5.2 mm, color: gray

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 50-5 GY - 3032127

<https://www.phoenixcontact.com/de/produkte/3032127>



Plug-in bridge, Version with single- or double-sided cutting edge. Please keep in mind the possible impact on touch protection as well as air clearances and creepage distances., pitch: 5.2 mm, color: gray

 Max. current carrying capacity: 24 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug-in bridge

Plug-in bridge - FBSR 2-5 - 3033702

<https://www.phoenixcontact.com/de/produkte/3033702>



Plug-in bridge, pitch: 5.2 mm, color: red

 Max. current carrying capacity: 17.5 A

---

## Plug-in bridge

Plug-in bridge - FBSR 3-5 - 3001591

<https://www.phoenixcontact.com/de/produkte/3001591>



Plug-in bridge, pitch: 5.2 mm, color: red

 Max. current carrying capacity: 17.5 A

---

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug-in bridge

Plug-in bridge - FBSR 4-5 - 3001592

<https://www.phoenixcontact.com/de/produkte/3001592>



Plug-in bridge, pitch: 5.2 mm, color: red

 Max. current carrying capacity: 17.5 A

---

## Plug-in bridge

Plug-in bridge - FBSR 5-5 - 3001593

<https://www.phoenixcontact.com/de/produkte/3001593>



Plug-in bridge, pitch: 5.2 mm, color: red

 Max. current carrying capacity: 17.5 A

---



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>




## Plug-in bridge

Plug-in bridge - FBSR 10-5 - 3033710

<https://www.phoenixcontact.com/de/produkte/3033710>



Plug-in bridge, pitch: 5.2 mm, color: red

 Max. current carrying capacity: 17.5 A

---

## Plug-in bridge

Plug-in bridge - FBS 2-5 BU - 3036877

<https://www.phoenixcontact.com/de/produkte/3036877>



Plug-in bridge, pitch: 5.2 mm, color: blue

 Max. current carrying capacity: 24 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Reducing bridge

Reducing bridge - RB ST (2,5/4)-1,5/S - 3214356

<https://www.phoenixcontact.com/de/produkte/3214356>



Reducing bridge, pitch: 6.7 mm, color: red

 Max. current carrying capacity: 24 A

---


## Reducing bridge

Reducing bridge - RB ST 6-(2,5/4) - 3030860

<https://www.phoenixcontact.com/de/produkte/3030860>



Reducing bridge, pitch: 9 mm, color: red

 Max. current carrying capacity: 35 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Reducing bridge

Reducing bridge - RB ST 10-(2,5/4) - 3030873

<https://www.phoenixcontact.com/de/produkte/3030873>



Reducing bridge, pitch: 10 mm, color: red

 Max. current carrying capacity: 35 A

---


## Reducing bridge

Reducing bridge - RB ST 16-(2,5/4) - 3030886

<https://www.phoenixcontact.com/de/produkte/3030886>



Reducing bridge, pitch: 11 mm, color: red

 Max. current carrying capacity: 35 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>


## Reducing bridge

Reducing bridge - RB ST 35-(2,5/4) - 3030899

<https://www.phoenixcontact.com/de/produkte/3030899>



Reducing bridge, pitch: 11 mm, color: red

 Max. current carrying capacity: 35 A

---


## Reducing bridge

Reducing bridge - RB ST (2,5/4)-1,5 - 3038943

<https://www.phoenixcontact.com/de/produkte/3038943>



Reducing bridge, pitch: 7.1 mm, color: red

 Max. current carrying capacity: 24 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>


## Reducing bridge

Reducing bridge - RB UT 6-ST(2,5/4) - 3047264

<https://www.phoenixcontact.com/de/produkte/3047264>



Reducing bridge, pitch: 9.5 mm, color: red

 Max. current carrying capacity: 35 A

---


## Reducing bridge

Reducing bridge - RB UT 35-ST(2,5/4) - 3047280

<https://www.phoenixcontact.com/de/produkte/3047280>



Reducing bridge, pitch: 10.8 mm, color: red

 Max. current carrying capacity: 40 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>


## Reducing bridge

Reducing bridge - RB UT 10-ST(2,5/4) - 3047086

<https://www.phoenixcontact.com/de/produkte/3047086>



Reducing bridge, pitch: 10.2 mm, color: red

 Max. current carrying capacity: 40 A

---


## Reducing bridge

Reducing bridge - RB UT 16-ST(2,5/4) - 3047099

<https://www.phoenixcontact.com/de/produkte/3047099>



Reducing bridge, pitch: 11 mm, color: red

 Max. current carrying capacity: 40 A

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## End cover

End cover - D-ST 2,5 - 3030417

<https://www.phoenixcontact.com/de/produkte/3030417>

End cover, length: 48.6 mm, width: 2.2 mm, height: 29.1 mm, color: gray



---

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733

<https://www.phoenixcontact.com/de/produkte/0801733>

DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Partition plate

Partition plate - ATP-ST 4 - 3030721

<https://www.phoenixcontact.com/de/produkte/3030721>

Partition plate, length: 59.8 mm, width: 2 mm, height: 39 mm, color: gray



---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681

<https://www.phoenixcontact.com/de/produkte/0801681>

DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)





# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Coding star

Coding star - PC - 3040588

<https://www.phoenixcontact.com/de/produkte/3040588>



Coding star, length: 3 mm, width: 3 mm, height: 6 mm, color: red

---

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119

<https://www.phoenixcontact.com/de/produkte/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Screwdriver

Screwdriver - SZF 1-0,6X3,5 - 1204517

<https://www.phoenixcontact.com/de/produkte/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - 1204122

<https://www.phoenixcontact.com/de/produkte/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Warning cover

Warning cover - WST 2,5 - 3030941

<https://www.phoenixcontact.com/de/produkte/3030941>



Warning cover, 5-pos., for terminal width: 5.2 mm

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704

<https://www.phoenixcontact.com/de/produkte/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Screw flange

Screw flange - ST 2,5/1P-F - 3209837

<https://www.phoenixcontact.com/de/produkte/3209837>



Screw flange, for screwing COMBI plugs, with the same structure and pitch as the relevant COMBI terminal blocks

---

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421

<https://www.phoenixcontact.com/de/produkte/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>



## Latching flange

Latching flange - ST 2,5/1P-FS - 3061376

<https://www.phoenixcontact.com/de/produkte/3061376>



Latching flange, mounting type: NS 35/7,5, NS 35/15, color: gray

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434

<https://www.phoenixcontact.com/de/produkte/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## End cover

End cover - D-ST 2,5-0,8 OG - 3030511

<https://www.phoenixcontact.com/de/produkte/3030511>

End cover, length: 48.6 mm, width: 0.8 mm, height: 29 mm, color: orange



---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - 0801762

<https://www.phoenixcontact.com/de/produkte/0801762>

DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Mounting material

Mounting material - ST-IL - 3039900

<https://www.phoenixcontact.com/de/produkte/3039900>

Operating decal for the ST terminal block



---

## End cap

End cap - NS 35/ 7,5 CAP - 1206560

<https://www.phoenixcontact.com/de/produkte/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Actuation tool

Actuation tool - ST-BW - 1207608

<https://www.phoenixcontact.com/de/produkte/1207608>

Actuation tool, for all 2.5 mm<sup>2</sup> - 4.0 mm<sup>2</sup> spring-cages



---

## Zack marker strip

Zack marker strip - ZB 5 :UNBEDRUCKT - 1050004

<https://www.phoenixcontact.com/de/produkte/1050004>

Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10





# Feed-through terminal block - ST 2,5/ 1P


3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Filler plugs

Filler plugs - CEC 2,5 - 3062757

<https://www.phoenixcontact.com/de/produkte/3062757>



Cover for conductor shaft, 10-pos., for spring cage terminal blocks (ST) and terminal blocks with push-in technology (PT) with a width of 5.2 mm

---

## Zack marker strip

Zack marker strip - ZB 5 CUS - 0824962

<https://www.phoenixcontact.com/de/produkte/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Component connector

Component connector - P-CO 2-5 R47K - 3032447

<https://www.phoenixcontact.com/de/produkte/3032447>



Component connector, with 47 kOhm resistance for wire-break monitoring, pitch: 5.2 mm, length: 8.9 mm, width: 4.1 mm, height: 34.8 mm, number of positions: 2, color: black

---

## Zack marker strip

Zack marker strip - ZB 5,LGS:FORTL.ZAHLEN - 1050017

<https://www.phoenixcontact.com/de/produkte/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Group cover marker

Group cover marker - BST 2,5 - 3061282

<https://www.phoenixcontact.com/de/produkte/3061282>




Cover for actuation shaft, 5-pos., for spring-cage terminal blocks with width of 5.2 mm

---

## Zack marker strip

Zack marker strip - ZB 5,QR:FORTL.ZAHLEN - 1050020

<https://www.phoenixcontact.com/de/produkte/1050020>



Zack marker strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Wire bridge

Wire bridge - FBSW 2-5/250MM - 3030172

<https://www.phoenixcontact.com/de/produkte/3030172>

Wire bridge, color: red/black



---

## Zack marker strip

Zack marker strip - ZB 5,LGS:GLEICHE ZAHLEN - 1050033

<https://www.phoenixcontact.com/de/produkte/1050033>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Wire bridge

Wire bridge - FBSW 2-5/60MM - 3030170

<https://www.phoenixcontact.com/de/produkte/3030170>

Wire bridge, Not suitable for railway applications, color: red/black




---

## Zack marker strip

Zack marker strip - ZB 5,LGS:L1-N,PE - 1050415

<https://www.phoenixcontact.com/de/produkte/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Wire bridge

Wire bridge - FBSW 2-5/110MM - 3030171

<https://www.phoenixcontact.com/de/produkte/3030171>

Wire bridge, color: red/black



---

## Marker for terminal blocks

Marker for terminal blocks - UC-TM 5 - 0818108

<https://www.phoenixcontact.com/de/produkte/0818108>

Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Marker for terminal blocks

Marker for terminal blocks - UC-TM 5 CUS - 0824581

<https://www.phoenixcontact.com/de/produkte/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96

---

## Marker for terminal blocks

Marker for terminal blocks - UCT-TM 5 - 0828734

<https://www.phoenixcontact.com/de/produkte/0828734>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Marker for terminal blocks

Marker for terminal blocks - UCT-TM 5 CUS - 0829595

<https://www.phoenixcontact.com/de/produkte/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

---

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5:UNBEDRUCKT - 0808642

<https://www.phoenixcontact.com/de/produkte/0808642>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5 CUS - 0825025

<https://www.phoenixcontact.com/de/produkte/0825025>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5,LGS:FORTL.ZAHLEN - 0808671

<https://www.phoenixcontact.com/de/produkte/0808671>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

# Feed-through terminal block - ST 2,5/ 1P


3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5,QR:FORTL.ZAHLEN - 0808697

<https://www.phoenixcontact.com/de/produkte/0808697>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5,LGS:GERADE ZAHLEN - 0810821

<https://www.phoenixcontact.com/de/produkte/0810821>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5,LGS:UNGERADE ZAHLEN - 0810863

<https://www.phoenixcontact.com/de/produkte/0810863>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## Marker for terminal blocks

Marker for terminal blocks - UC-TMF 5 - 0818153

<https://www.phoenixcontact.com/de/produkte/0818153>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Marker for terminal blocks

Marker for terminal blocks - UC-TMF 5 CUS - 0824638

<https://www.phoenixcontact.com/de/produkte/0824638>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

---

## Marker for terminal blocks

Marker for terminal blocks - UCT-TMF 5 - 0828744

<https://www.phoenixcontact.com/de/produkte/0828744>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Marker for terminal blocks

Marker for terminal blocks - UCT-TMF 5 CUS - 0829658

<https://www.phoenixcontact.com/de/produkte/0829658>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

---

## Test plugs

Test plugs - MPS-MT - 0201744

<https://www.phoenixcontact.com/de/produkte/0201744>



Test plugs, with solder connection up to 1 mm<sup>2</sup> conductor cross section, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663

<https://www.phoenixcontact.com/de/produkte/0201663>

Insulating sleeve, color: white



---

## Insulating sleeve

Insulating sleeve - MPS-IH RD - 0201676

<https://www.phoenixcontact.com/de/produkte/0201676>

Insulating sleeve, color: red



# Feed-through terminal block - ST 2,5/ 1P

3040012


<https://www.phoenixcontact.com/de/produkte/3040012>

## Insulating sleeve

Insulating sleeve - MPS-IH BU - 0201689

<https://www.phoenixcontact.com/de/produkte/0201689>

Insulating sleeve, color: blue



---

## Insulating sleeve

Insulating sleeve - MPS-IH YE - 0201692

<https://www.phoenixcontact.com/de/produkte/0201692>

Insulating sleeve, color: yellow



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Insulating sleeve

Insulating sleeve - MPS-IH GN - 0201702

<https://www.phoenixcontact.com/de/produkte/0201702>

Insulating sleeve, color: green



---

## Insulating sleeve

Insulating sleeve - MPS-IH GY - 0201728

<https://www.phoenixcontact.com/de/produkte/0201728>

Insulating sleeve, color: gray





# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>



## Insulating sleeve

Insulating sleeve - MPS-IH BK - 0201731

<https://www.phoenixcontact.com/de/produkte/0201731>

Insulating sleeve, color: black



---

## Insulating sleeve

Insulating sleeve - ISH 2,5/0,2 - 3002843

<https://www.phoenixcontact.com/de/produkte/3002843>

Insulating sleeve, color: white



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Insulating sleeve

Insulating sleeve - ISH 2,5/0,5 - 3002856

<https://www.phoenixcontact.com/de/produkte/3002856>



Insulating sleeve, color: gray

---

## Insulating sleeve

Insulating sleeve - ISH 2,5/1,0 - 3002869

<https://www.phoenixcontact.com/de/produkte/3002869>



Insulating sleeve, color: black

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Test adapter

Test adapter - PAI-4-FIX-5/6 BU - 3035975

<https://www.phoenixcontact.com/de/produkte/3035975>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## Test adapter

Test adapter - PAI-4-FIX-5/6 OG - 3035974

<https://www.phoenixcontact.com/de/produkte/3035974>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Test adapter

Test adapter - PAI-4-FIX-5/6 YE - 3035977

<https://www.phoenixcontact.com/de/produkte/3035977>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## Test adapter

Test adapter - PAI-4-FIX-5/6 RD - 3035976

<https://www.phoenixcontact.com/de/produkte/3035976>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Test adapter

Test adapter - PAI-4-FIX-5/6 GN - 3035978

<https://www.phoenixcontact.com/de/produkte/3035978>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## Test adapter

Test adapter - PAI-4-FIX-5/6 BK - 3035980

<https://www.phoenixcontact.com/de/produkte/3035980>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Test adapter

Test adapter - PAI-4-FIX-5/6 GY - 3035982

<https://www.phoenixcontact.com/de/produkte/3035982>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



---

## Test adapter

Test adapter - PAI-4-FIX-5/6 VT - 3035979

<https://www.phoenixcontact.com/de/produkte/3035979>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Test adapter

Test adapter - PAI-4-FIX-5/6 BN - 3035981

<https://www.phoenixcontact.com/de/produkte/3035981>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## Test adapter

Test adapter - PAI-4-FIX-5/6 WH - 3035983

<https://www.phoenixcontact.com/de/produkte/3035983>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Test plugs

Test plugs - PS-5 - 3030983

<https://www.phoenixcontact.com/de/produkte/3030983>



Test plugs, Modular test plug, color: red

---

## Spacer plate

Spacer plate - DP PS-5 - 3036725

<https://www.phoenixcontact.com/de/produkte/3036725>



Spacer plate, length: 22.4 mm, width: 5.2 mm, height: 29 mm, number of positions: 1, color: red



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Test plugs

Test plugs - PS-5/2,3MM RD - 3038723

<https://www.phoenixcontact.com/de/produkte/3038723>



Test plugs, color: red

---

## End clamp

End clamp - E/AL-NS 35 - 1201662

<https://www.phoenixcontact.com/de/produkte/1201662>



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP 2,5/ 1 - 3040258

<https://www.phoenixcontact.com/de/produkte/3040258>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/ 2 - 3040261

<https://www.phoenixcontact.com/de/produkte/3040261>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP 2,5/ 3 - 3040274

<https://www.phoenixcontact.com/de/produkte/3040274>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/ 4 - 3040287

<https://www.phoenixcontact.com/de/produkte/3040287>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP 2,5/ 5 - 3040290

<https://www.phoenixcontact.com/de/produkte/3040290>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/ 6 - 3040300

<https://www.phoenixcontact.com/de/produkte/3040300>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP 2,5/ 7 - 3040313

<https://www.phoenixcontact.com/de/produkte/3040313>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/ 8 - 3040326

<https://www.phoenixcontact.com/de/produkte/3040326>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP 2,5/ 9 - 3040339

<https://www.phoenixcontact.com/de/produkte/3040339>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/10 - 3040342

<https://www.phoenixcontact.com/de/produkte/3040342>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP 2,5/11 - 3040355

<https://www.phoenixcontact.com/de/produkte/3040355>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/12 - 3040368

<https://www.phoenixcontact.com/de/produkte/3040368>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP 2,5/13 - 3040371

<https://www.phoenixcontact.com/de/produkte/3040371>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/14 - 3040384

<https://www.phoenixcontact.com/de/produkte/3040384>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP 2,5/15 - 3040397

<https://www.phoenixcontact.com/de/produkte/3040397>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/ 1 BU - 3040698

<https://www.phoenixcontact.com/de/produkte/3040698>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP 2,5/ 1 GNYE - 3040708

<https://www.phoenixcontact.com/de/produkte/3040708>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

## Plug

Plug - SPB 2,5/ 1 - 3040106

<https://www.phoenixcontact.com/de/produkte/3040106>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPB 2,5/ 2 - 3040119

<https://www.phoenixcontact.com/de/produkte/3040119>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/ 3 - 3040122

<https://www.phoenixcontact.com/de/produkte/3040122>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPB 2,5/ 4 - 3040135

<https://www.phoenixcontact.com/de/produkte/3040135>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/ 5 - 3040143

<https://www.phoenixcontact.com/de/produkte/3040143>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPB 2,5/ 6 - 3040151

<https://www.phoenixcontact.com/de/produkte/3040151>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/ 7 - 3040164

<https://www.phoenixcontact.com/de/produkte/3040164>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPB 2,5/ 8 - 3040177

<https://www.phoenixcontact.com/de/produkte/3040177>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/ 9 - 3040180

<https://www.phoenixcontact.com/de/produkte/3040180>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPB 2,5/10 - 3040193

<https://www.phoenixcontact.com/de/produkte/3040193>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/11 - 3040203

<https://www.phoenixcontact.com/de/produkte/3040203>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPB 2,5/12 - 3040216

<https://www.phoenixcontact.com/de/produkte/3040216>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/13 - 3040229

<https://www.phoenixcontact.com/de/produkte/3040229>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPB 2,5/14 - 3040232

<https://www.phoenixcontact.com/de/produkte/3040232>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/15 - 3040245

<https://www.phoenixcontact.com/de/produkte/3040245>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPB 2,5/ 1 BU - 3040724

<https://www.phoenixcontact.com/de/produkte/3040724>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SPB 2,5/ 1 GNYE - 3040711

<https://www.phoenixcontact.com/de/produkte/3040711>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPDB 2,5/ 1 - 3040407

<https://www.phoenixcontact.com/de/produkte/3040407>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/ 2 - 3040410

<https://www.phoenixcontact.com/de/produkte/3040410>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPDB 2,5/ 3 - 3040423

<https://www.phoenixcontact.com/de/produkte/3040423>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/ 4 - 3040436

<https://www.phoenixcontact.com/de/produkte/3040436>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPDB 2,5/ 5 - 3040449

<https://www.phoenixcontact.com/de/produkte/3040449>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/ 6 - 3040452

<https://www.phoenixcontact.com/de/produkte/3040452>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPDB 2,5/ 7 - 3040465

<https://www.phoenixcontact.com/de/produkte/3040465>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/ 8 - 3040478

<https://www.phoenixcontact.com/de/produkte/3040478>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPDB 2,5/ 9 - 3040481

<https://www.phoenixcontact.com/de/produkte/3040481>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/10 - 3040494

<https://www.phoenixcontact.com/de/produkte/3040494>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPDB 2,5/11 - 3040504

<https://www.phoenixcontact.com/de/produkte/3040504>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/12 - 3040517

<https://www.phoenixcontact.com/de/produkte/3040517>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPDB 2,5/13 - 3040520

<https://www.phoenixcontact.com/de/produkte/3040520>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/14 - 3040533

<https://www.phoenixcontact.com/de/produkte/3040533>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPDB 2,5/15 - 3040546

<https://www.phoenixcontact.com/de/produkte/3040546>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/ 1 BU - 3040737

<https://www.phoenixcontact.com/de/produkte/3040737>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPDB 2,5/ 1 GNYE - 3040740

<https://www.phoenixcontact.com/de/produkte/3040740>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

## Plug

Plug - SP-H 2,5/ 1 - 3210619

<https://www.phoenixcontact.com/de/produkte/3210619>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/ 2 - 3210622

<https://www.phoenixcontact.com/de/produkte/3210622>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 3 - 3210635

<https://www.phoenixcontact.com/de/produkte/3210635>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/ 4 - 3210648

<https://www.phoenixcontact.com/de/produkte/3210648>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 5 - 3210651

<https://www.phoenixcontact.com/de/produkte/3210651>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/ 6 - 3210664

<https://www.phoenixcontact.com/de/produkte/3210664>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 7 - 3210677

<https://www.phoenixcontact.com/de/produkte/3210677>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/ 8 - 3210680

<https://www.phoenixcontact.com/de/produkte/3210680>




Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 9 - 3210693

<https://www.phoenixcontact.com/de/produkte/3210693>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/10 - 3210703

<https://www.phoenixcontact.com/de/produkte/3210703>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/11 - 3210716

<https://www.phoenixcontact.com/de/produkte/3210716>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/12 - 3210729

<https://www.phoenixcontact.com/de/produkte/3210729>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/13 - 3210732

<https://www.phoenixcontact.com/de/produkte/3210732>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/14 - 3210745

<https://www.phoenixcontact.com/de/produkte/3210745>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/15 - 3210758

<https://www.phoenixcontact.com/de/produkte/3210758>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/ 1 BU - 3210761

<https://www.phoenixcontact.com/de/produkte/3210761>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SP-H 2,5/ 1 GNYE - 3210774

<https://www.phoenixcontact.com/de/produkte/3210774>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/ 1-L - 3210787

<https://www.phoenixcontact.com/de/produkte/3210787>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 1-L BU - 3210790

<https://www.phoenixcontact.com/de/produkte/3210790>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/ 1-L GNYE - 3210800

<https://www.phoenixcontact.com/de/produkte/3210800>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

## Plug

Plug - SP-H 2,5/ 1-M - 3210813

<https://www.phoenixcontact.com/de/produkte/3210813>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/ 1-M BU - 3210826

<https://www.phoenixcontact.com/de/produkte/3210826>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SP-H 2,5/ 1-M GNYE - 3210839

<https://www.phoenixcontact.com/de/produkte/3210839>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/ 1-R - 3210842

<https://www.phoenixcontact.com/de/produkte/3210842>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 1-R BU - 3210855

<https://www.phoenixcontact.com/de/produkte/3210855>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SP-H 2,5/ 1-R GNYE - 3210868

<https://www.phoenixcontact.com/de/produkte/3210868>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

## Plug

Plug - SPV 2,5/ 1 - 3041710

<https://www.phoenixcontact.com/de/produkte/3041710>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/ 2 - 3041723

<https://www.phoenixcontact.com/de/produkte/3041723>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/ 3 - 3041736

<https://www.phoenixcontact.com/de/produkte/3041736>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/ 4 - 3041749

<https://www.phoenixcontact.com/de/produkte/3041749>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/ 5 - 3041752

<https://www.phoenixcontact.com/de/produkte/3041752>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/ 6 - 3041765

<https://www.phoenixcontact.com/de/produkte/3041765>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/ 7 - 3041778

<https://www.phoenixcontact.com/de/produkte/3041778>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/ 8 - 3041781

<https://www.phoenixcontact.com/de/produkte/3041781>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/ 9 - 3041794

<https://www.phoenixcontact.com/de/produkte/3041794>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/10 - 3041804

<https://www.phoenixcontact.com/de/produkte/3041804>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/11 - 3041817

<https://www.phoenixcontact.com/de/produkte/3041817>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/12 - 3041820

<https://www.phoenixcontact.com/de/produkte/3041820>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/13 - 3041833

<https://www.phoenixcontact.com/de/produkte/3041833>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/14 - 3041846

<https://www.phoenixcontact.com/de/produkte/3041846>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/15 - 3041859

<https://www.phoenixcontact.com/de/produkte/3041859>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/ 1 BU - 3061017

<https://www.phoenixcontact.com/de/produkte/3061017>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SPV 2,5/ 1 GNYE - 3061020

<https://www.phoenixcontact.com/de/produkte/3061020>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow



# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/ 1-L - 3041024

<https://www.phoenixcontact.com/de/produkte/3041024>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/ 1-L BU - 3041037

<https://www.phoenixcontact.com/de/produkte/3041037>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/ 1-L GNYE - 3041040

<https://www.phoenixcontact.com/de/produkte/3041040>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

## Plug

Plug - SPV 2,5/ 1-M - 3041053

<https://www.phoenixcontact.com/de/produkte/3041053>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/ 1-M BU - 3041066

<https://www.phoenixcontact.com/de/produkte/3041066>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SPV 2,5/ 1-M GNYE - 3041079

<https://www.phoenixcontact.com/de/produkte/3041079>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/ 1-R - 3041082

<https://www.phoenixcontact.com/de/produkte/3041082>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/ 1-R BU - 3041095

<https://www.phoenixcontact.com/de/produkte/3041095>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Feed-through terminal block - ST 2,5/ 1P

3040012

<https://www.phoenixcontact.com/de/produkte/3040012>

## Plug

Plug - SPV 2,5/ 1-R GNYE - 3041105

<https://www.phoenixcontact.com/de/produkte/3041105>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH

Flachsmarktstraße 8

D-32825 Blomberg

+49 52 35/3-1 20 00

[info@phoenixcontact.de](mailto:info@phoenixcontact.de)