

Connector - SACC-M12FS-4QO-0,34-M



1641688

<https://www.phoenixcontact.com/pc/products/1641688>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Connector, Universal, 4-position, Socket straight M12, Coding: A, Insulation displacement connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 3.5 mm ... 6 mm

Your advantages

- Safe use in the field, thanks to a high degree of protection
- Insulation displacement connection: innovative and time-saving assembly without stripping the single wire

Connector - SACC-M12FS-4QO-0,34-M



1641688

<https://www.phoenixcontact.com/pc/products/1641688>

Commercial Data

| | |
|--------------------------------------|--------------------|
| Item number | 1641688 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Product Key | BF2CCA |
| Catalog Page | Page 20 (C-2-2019) |
| GTIN | 4017918925178 |
| Weight per Piece (including packing) | 14.84 g |
| Weight per Piece (excluding packing) | 14.7 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

Technical Data

Notes

| | |
|-----------------------|--|
| Assembly instruction: | NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties. |
|-----------------------|--|

Product properties

| | |
|----------------------|---------------------------------|
| Product type | Circular connector (cable-side) |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| Shielded | no |
| Coding | A - standard |
| Cable outlet | straight |


Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Ambient conditions

| | |
|---------------------------------|-----------------------------------|
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) | -25 °C ... 80 °C (Plug / socket) |
| Ambient temperature (assembly) | -5 °C ... 50 °C (During assembly) |

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Length | 51 mm |

External dimensions

| | |
|------------------|-----------------|
| Outside diameter | 3.5 mm ... 6 mm |
|------------------|-----------------|

Housing

| | |
|------------------|---------|
| Diameter housing | 16.3 mm |
|------------------|---------|

Connector

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|-------|

Header 1

| | |
|-------------------|----------|
| Head design | Socket |
| Head cable outlet | straight |

Connector - SACC-M12FS-4QO-0,34-M



1641688

<https://www.phoenixcontact.com/pc/products/1641688>

| | |
|-----------------------------|------------------------------------|
| Head thread type | M12 |
| Coding | A-coded |
| Number of positions | 4 |
| Coding | A - standard |
| Insertion/withdrawal cycles | ≥ 100 |
| Connection method | Insulation displacement connection |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Number of positions | 4 |
| Coding | A - standard |
| Insertion/withdrawal cycles | ≥ 100 |
| Connection method | Insulation displacement connection |
| Contact material | CuSn |
| Contact surface material | Ni/Au |

Electrical properties

| | |
|--------------------------------|----------------------|
| Rated surge voltage | 2.5 kV |
| Contact resistance | ≤ 5 mΩ |
| Insulation resistance | ≥ 100 MΩ |
| Nominal voltage U _N | 125 V AC 125 V DC |
| Nominal current I _N | 4 A |

Material specifications

| | |
|--|----------------------------------|
| Color Handle area | black |
| Flammability rating according to UL 94 | V0 |
| Sealing material | NBR Neoprene (Cable clamping) |
| Material of grip body | PA 6 |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU |
| Cable gland material | Zinc die-cast, nickel-plated |
| Wire insulation material | PVC / PE / PP / rubber |

Connection data

Conductor connection

| | |
|----------------------------------|---|
| Connection method | Insulation displacement connection |
| Conductor cross section flexible | 0.14 mm ² ... 0.34 mm ² |
| Cross section AWG | 26 ... 22 |

Pin assignment

| | |
|---|------------------|
| Contact Color (signal designation) Contact (optional) | 1 = BN 2 = WH |
|---|------------------|

Connector - SACC-M12FS-4QO-0,34-M



1641688

<https://www.phoenixcontact.com/pc/products/1641688>

| | |
|--|--------|
| | 3 = BU |
| | 4 = BK |

Mounting

| | |
|-----------------------|---|
| Assembly instructions | AWG 20 conductor cross section upon request |
|-----------------------|---|

Standards and regulations

M12

| | |
|--------------------------|------------------------------|
| Standards/specifications | according to IEC 61076-2-101 |
|--------------------------|------------------------------|

Cable / line

Cable structure

| | |
|-------------------------|-----------------|
| Signal type/category | Universal |
| External cable diameter | 3.5 mm ... 6 mm |


Connector - SACC-M12FS-4QO-0,34-M

1641688

<https://www.phoenixcontact.com/pc/products/1641688>


Drawings

Schematic diagram

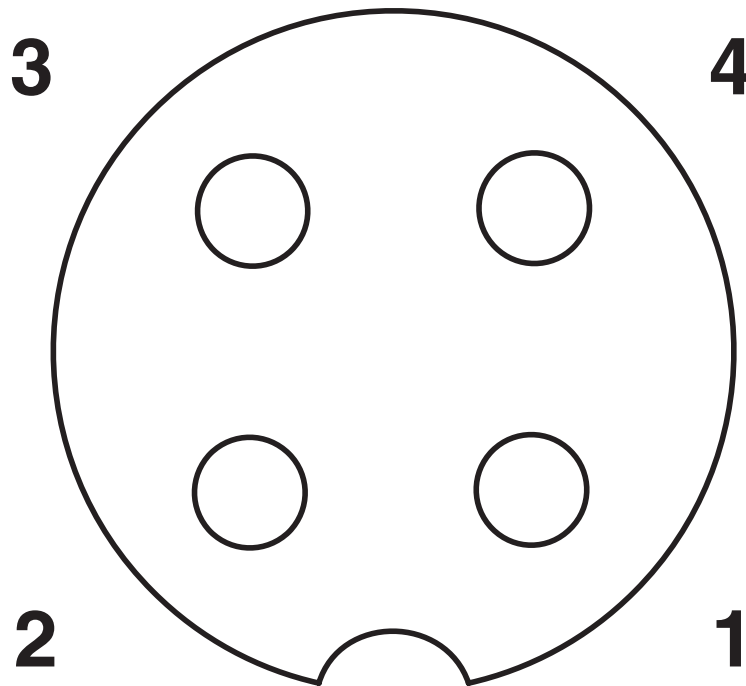

Pin assignment M12 socket, 4-pos., A-coded, view female side

Dimensional drawing

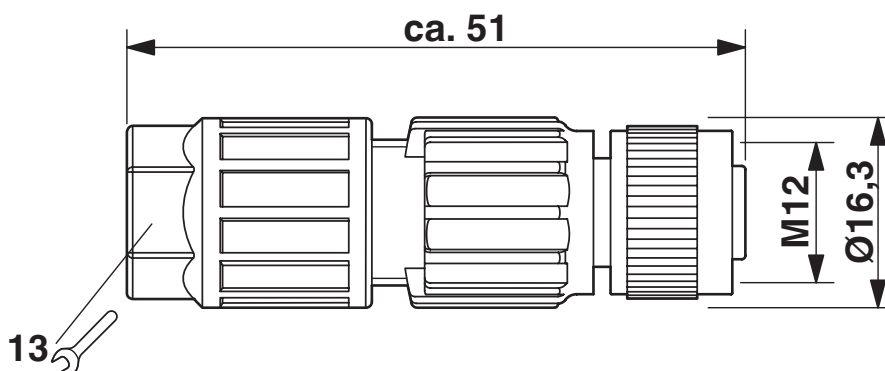


M12 x 1 socket, straight

Connector - SACC-M12FS-4QO-0,34-M



1641688

<https://www.phoenixcontact.com/pc/products/1641688>

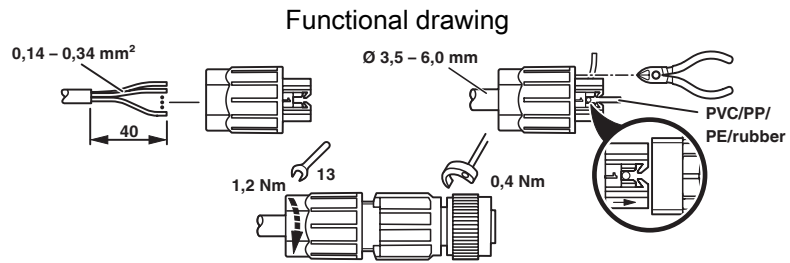

Connector - SACC-M12FS-4QO-0,34-M




1641688

<https://www.phoenixcontact.com/pc/products/1641688>

Approvals

|  cUL Recognized Approval ID: FILE E 118976 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| | 300 V | 4 A | - | - |

|  UL Recognized Approval ID: FILE E 118976 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| | 300 V | 4 A | - | - |

|  EAC Approval ID: EAC-Zulassung | |
|--|--|
|--|--|

|  EAC Approval ID: RU C-DE.BL08.B.00511 | |
|---|--|
|---|--|

| cULus Recognized | |
|-------------------------|--|
|-------------------------|--|

Connector - SACC-M12FS-4QO-0,34-M



1641688

<https://www.phoenixcontact.com/pc/products/1641688>

Classifications

ECLASS

| | |
|---------------|----------|
| ECLASS-10.0.1 | 27440102 |
| ECLASS-9.0 | 27440102 |
| ECLASS-11.0 | 27440102 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC002635 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

Connector - SACC-M12FS-4QO-0,34-M



1641688

<https://www.phoenixcontact.com/pc/products/1641688>

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Connector - SACC-M12FS-4QO-0,34-M



1641688

<https://www.phoenixcontact.com/pc/products/1641688>

Accessories

Screw plug

Screw plug - PROT-M12 MS-PA-CHAIN - 1430899

<https://www.phoenixcontact.com/pc/products/1430899>

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



Cable reel

Cable reel - SAC-4P-100,0-PUR/0,25 - 1501692

<https://www.phoenixcontact.com/pc/products/1501692>

By the meter, Cable reel, PUR halogen-free, black-gray RAL 7021, 4-wire, color single wire: brown, white, blue, black, cable length: 100 m



Connector - SACC-M12FS-4QO-0,34-M

1641688

<https://www.phoenixcontact.com/pc/products/1641688>

Cable reel

Cable reel - SAC-4P-100,0-PUR/0,34 - 1501663

<https://www.phoenixcontact.com/pc/products/1501663>



By the meter, Cable reel, PUR halogen-free, black-gray RAL 7021, 4-wire, color single wire: brown, white, blue, black, cable length: 100 m

Torque screwdriver

Torque screwdriver - TSD 04 SAC - 1208429

<https://www.phoenixcontact.com/pc/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

Connector - SACC-M12FS-4QO-0,34-M

1641688

<https://www.phoenixcontact.com/pc/products/1641688>

Torque screwdriver

Torque screwdriver - TSD-M 1,2NM - 1212224

<https://www.phoenixcontact.com/pc/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

Adapter insert

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600

<https://www.phoenixcontact.com/pc/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

Connector - SACC-M12FS-4QO-0,34-M



1641688

<https://www.phoenixcontact.com/pc/products/1641688>

Tool

Tool - SAC BIT M12-D15 - 1208432

<https://www.phoenixcontact.com/pc/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

Tool

Tool - SAC BIT QUICKON-W13 - 1212033

<https://www.phoenixcontact.com/pc/products/1212033>



Nut for assembling pressure nuts with 13 mm wrench size, for 4 mm hexagonal drive

Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com