

# Single relay - REL-MR-230AC/21HC/MS



2987914

<https://www.phoenixcontact.com/de/produkte/2987914>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

---



Plug-in miniature relay, with power contact, 1 changeover contact, test button, mechanical switching position indicator, status LED, input voltage 230 V AC

---

## Your advantages

- With detectable manual operation
- Integrated status LED
- DC types with integrated freewheeling diode
- Switching current of up to 16 A
- Mechanical switch position indicator

# Single relay - REL-MR-230AC/21HC/MS



2987914

<https://www.phoenixcontact.com/de/produkte/2987914>

## Commercial Data

Item number	2987914
Packing unit	10 pc
Minimum order quantity	10 pc
Sales Key	G1 - Relais
Product Key	CK6195
Catalog Page	Page 292 (C-5-2019)
GTIN	4046356481045
Weight per Piece (including packing)	19,54 g
Weight per Piece (excluding packing)	18,31 g
Customs tariff number	85364900
Country of origin	CN

# Single relay - REL-MR-230AC/21HC/MS



2987914

<https://www.phoenixcontact.com/de/produkte/2987914>

## Technical Data

### Product properties

Product type	Single relay
Set comprises	2905290 RIF-1-RPT-LV-230AC/1X21MS
	2905661 RIF-1-RSC-LV-230AC/1X21MS
Mechanical service life	5x 10 <sup>6</sup> cycles

### Electrical properties

Service life electrical	see diagram
Maximum power dissipation for nominal condition	0.81 W
Test voltage	5 kV AC (50 Hz, 1 min., winding/contact)

### Input data

#### Coil side

Nominal input voltage U <sub>N</sub>	230 V AC
Input voltage range	179.4 V AC ... 333.5 V AC
Mains frequency	50/60 Hz
Typical input current at U <sub>N</sub>	3.5 mA
Typical release time range	2 ms ... 8 ms (depending on phase relation)

### Output data

#### Switching

Contact type	1 changeover contact
Type of switch contact	Single contact
Drive and function	monostable
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V (at 10 mA)
Limiting continuous current	16 A
Maximum inrush current	32 A (20 ms)
Min. switching current	10 mA (at 12 V)
Interrupting rating (ohmic load) max.	4000 VA (for 250 V AC)
Switching capacity	2 A (at 24 V, DC13)
	3 A (at 24 V, AC15)
	3 A (at 120 V, AC15)
	3 A (at 240 V, AC15)
Motor load according to UL 508	1/2 HP, 120 V AC (N/O contact)
	1 HP, 240 V AC (N/O contact)
	1/3 HP, 120 V AC (N/C contact)
	1/2 HP, 240 V AC (N/C contact)

### Connection data

# Single relay - REL-MR-230AC/21HC/MS




2987914

<https://www.phoenixcontact.com/de/produkte/2987914>

Connection method	Solder connection
-------------------	-------------------

## Dimensions

Dimensional drawing	
Width	12.7 mm
Height	29 mm
Depth	25 mm

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

## Approval data

### Corrosive gas test

Identification	ISA-S71.04. G3 Harsh Group
	EN 60068-2-60

## Standards and regulations

Standards/regulations	EN 61810-1
	VDE 0435-201
	EN 50178


# Single relay - REL-MR-230AC/21HC/MS

2987914

<https://www.phoenixcontact.com/de/produkte/2987914>

## Drawings

Diagram

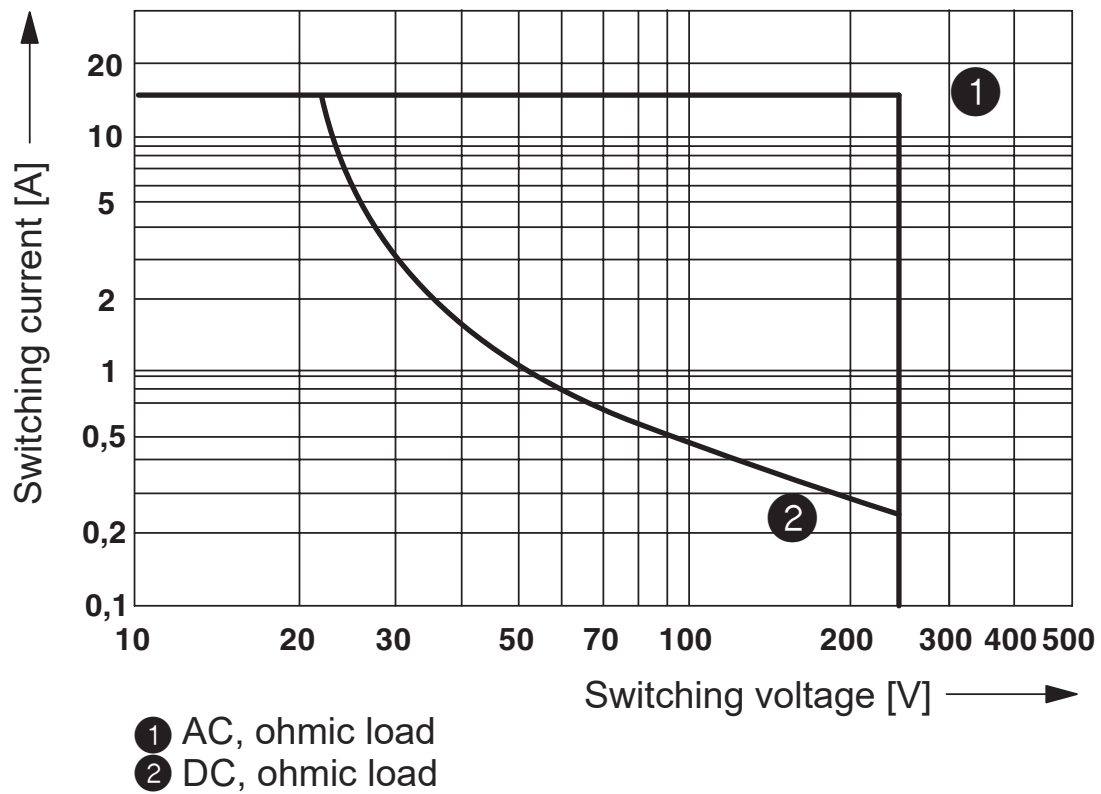


Interrupting rating

# Single relay - REL-MR-230AC/21HC/MS

2987914

<https://www.phoenixcontact.com/de/produkte/2987914>


Diagram

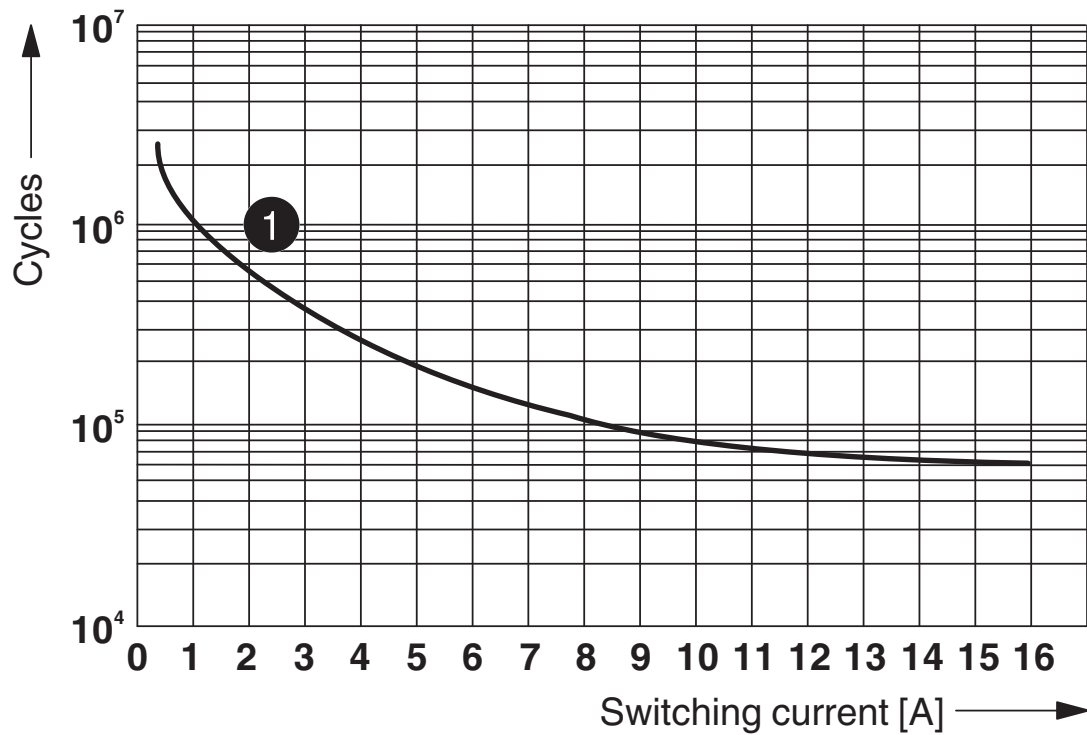

① 250 V AC, ohmic load

Electrical service life


Circuit diagram

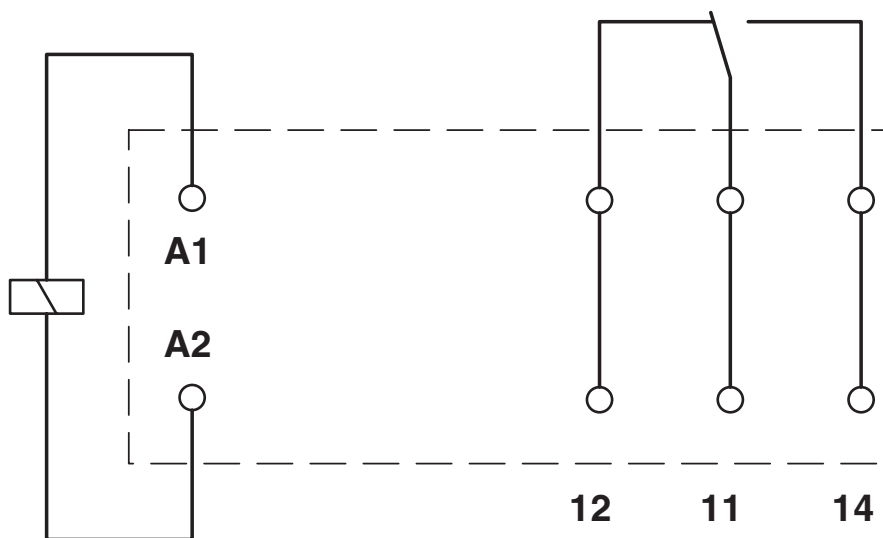

# Single relay - REL-MR-230AC/21HC/MS


2987914

<https://www.phoenixcontact.com/de/produkte/2987914>

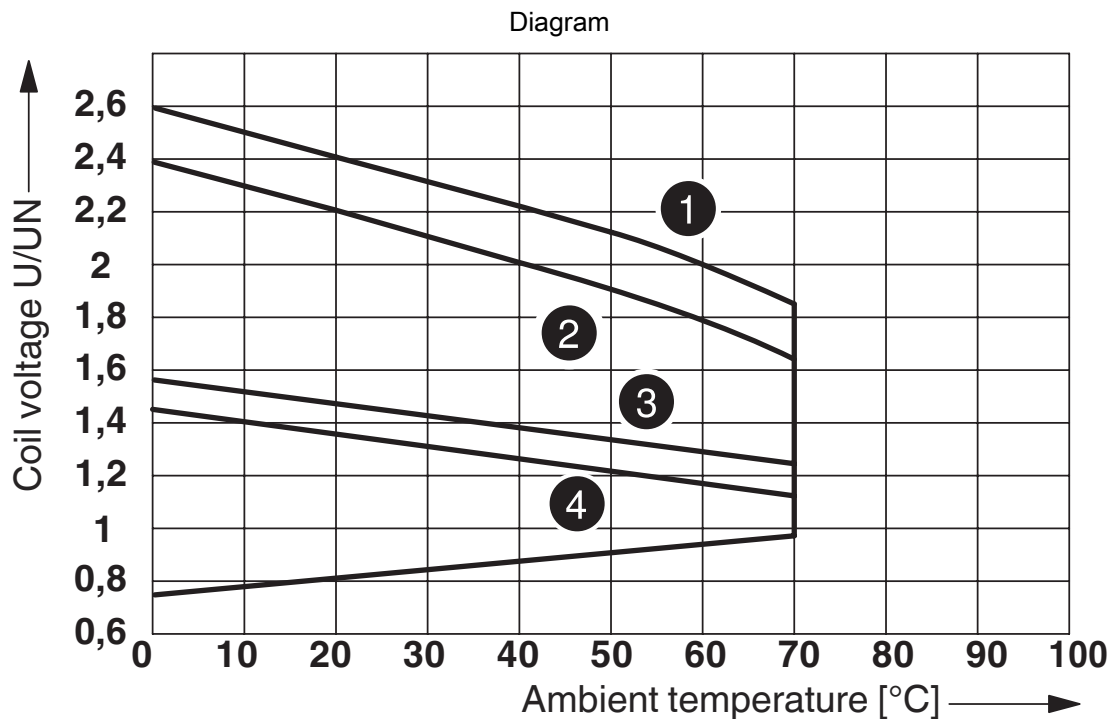


- ① DC coils, 0 A contact current
- ② DC coils, 16 A contact current
- ③ AC coils, 0 A contact current
- ④ AC coils, 16 A contact current

Operating voltage range

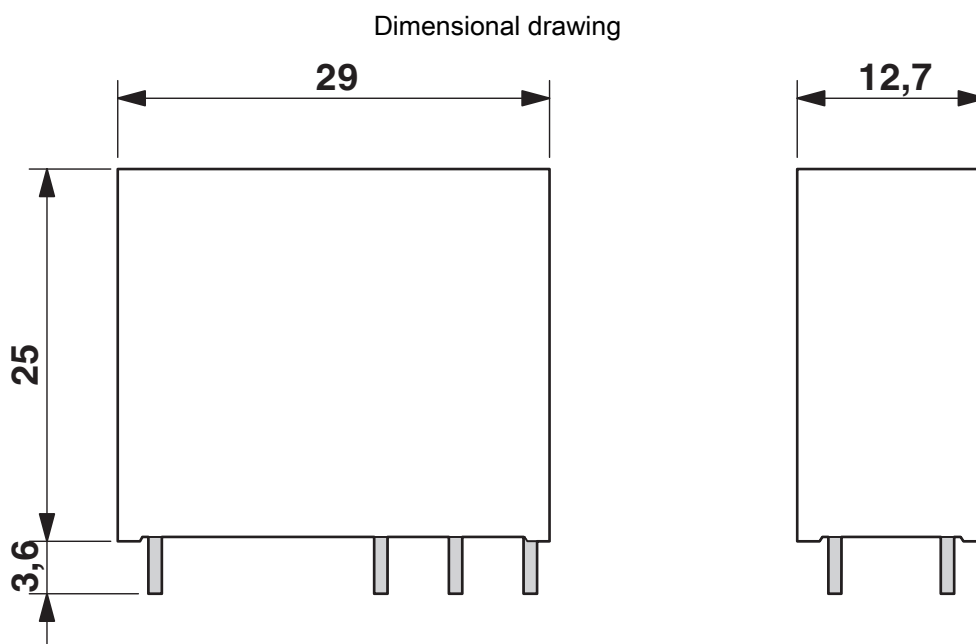

Diagram

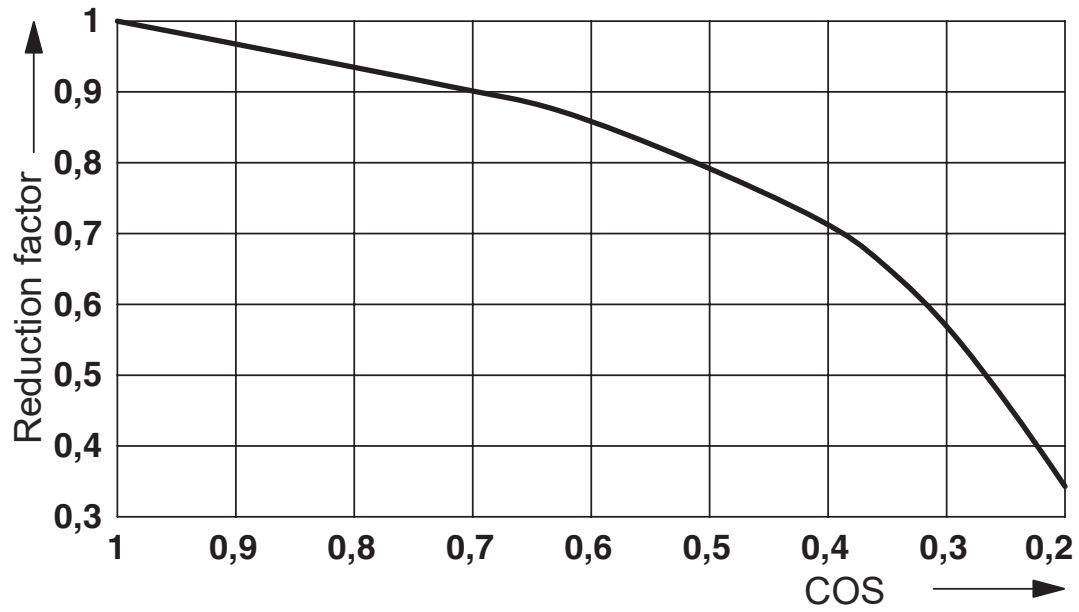

Service life reduction factor with various cos phi



# Single relay - REL-MR-230AC/21HC/MS



2987914

<https://www.phoenixcontact.com/de/produkte/2987914>

## Approvals



**cUL Recognized**  
Approval ID: FILE E 195083



**UL Recognized**  
Approval ID: FILE E 195083



**EAC**  
Approval ID: TR\_TS\_D\_00573\_c



**EAC**  
Approval ID: RU\*C-DE.\*08.B.00010



**VDE Zeichengenehmigung**  
Approval ID: 40027210

	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$
Mark approval certificate			-	-

**cULus Recognized**

# Single relay - REL-MR-230AC/21HC/MS



2987914

<https://www.phoenixcontact.com/de/produkte/2987914>

## Classifications

### ECLASS

ECLASS-9.0	27371601
ECLASS-10.0.1	27371601
ECLASS-11.0	27371601

### ETIM

ETIM 8.0	EC001437
----------	----------

### UNSPSC

UNSPSC 21.0	39122300
-------------	----------

# Single relay - REL-MR-230AC/21HC/MS



2987914

<https://www.phoenixcontact.com/de/produkte/2987914>

## Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# Single relay - REL-MR-230AC/21HC/MS

2987914

<https://www.phoenixcontact.com/de/produkte/2987914>

## Accessories

### Relay base

Relay base - RIF-1-BPT/2X21 - 2900931

<https://www.phoenixcontact.com/de/produkte/2900931>



Relay base RIF-1..., for miniature power relay with 1 or 2 changeover contacts or solid-state relays of the same design, Push-in connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

---

### Relay base

Relay base - RIF-1-BSC/2X21 - 2900930

<https://www.phoenixcontact.com/de/produkte/2900930>



RIF-1... relay base, for miniature power relay with 1 or 2 changeover contacts or identical solid-state relays, screw connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

---

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH

Flachsmarktstraße 8

D-32825 Blomberg

+49 52 35/3-1 20 00

[info@phoenixcontact.de](mailto:info@phoenixcontact.de)