

# Connector - SACC-MS-5CON-PG 7-M SCO



1542965

<https://www.phoenixcontact.com/pc/products/1542965>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

---



Connector, Universal, 5-position, Plug straight M12 SPEEDCON, Coding: A, Screw connection, knurl material: Zinc die-cast, nickel-plated, cable gland Pg7, external cable diameter 4 mm ... 6 mm

---

## Your advantages

- Safe use in the field, thanks to a high degree of protection
- Save time, thanks to installation with SPEEDCON fast locking system
- Screw connection: proven connection technology for a large selection of different conductors

# Connector - SACC-MS-5CON-PG 7-M SCO



1542965

<https://www.phoenixcontact.com/pc/products/1542965>

## Commercial Data

Item number	1542965
Packing unit	1 pc
Minimum order quantity	1 pc
Product Key	BF2CAA
Catalog Page	Page 20 (C-2-2017)
GTIN	4046356097673
Weight per Piece (including packing)	24.06 g
Weight per Piece (excluding packing)	23.5 g
Customs tariff number	85366990
Country of origin	DE

## Technical Data

### Notes

Assembly instruction:	<b>NOTE:</b> Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
-----------------------	--

### Product properties

Product type	Circular connector (cable-side)
Number of positions	5
No. of cable outlets	1
Shielded	no
Coding	A - standard
Cable outlet	straight
Pg screw connection	Pg7


### Insulation characteristics

Overvoltage category	II
Degree of pollution	3

### Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 85 °C (Plug / socket)

### Dimensions

Dimensional drawing	
Length	62 mm

### External dimensions

Outside diameter	4 mm ... 6 mm
------------------	---------------

### Housing

Diameter housing	20 mm
------------------	-------

### Connector

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

### Header 1

Head design	Plug
Head cable outlet	straight
Head thread type	M12

# Connector - SACC-MS-5CON-PG 7-M SCO



1542965

<https://www.phoenixcontact.com/pc/products/1542965>

Head locking type	SPEEDCON
Coding	A-coded
Number of positions	5
Coding	A - standard
Insertion/withdrawal cycles	≥ 100
Connection method	Screw connection
Contact material	CuZn
Contact surface material	CuSnZn
Number of positions	5
Coding	A - standard
Insertion/withdrawal cycles	≥ 100
Connection method	Screw connection
Contact material	CuZn
Contact surface material	CuSnZn

## Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	≤ 8 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U <sub>N</sub>	48 V AC 60 V DC
Nominal current I <sub>N</sub>	4 A

## Material specifications

Flammability rating according to UL 94	HB
Sealing material	NBR
Material of grip body	PBT
Contact material	CuZn
Contact surface material	CuSnZn
Contact carrier material	PA
Cable gland material	Zinc die-cast, nickel-plated

## Connection data

### Conductor connection

Connection method	Screw connection
Conductor cross section flexible	0.25 mm <sup>2</sup> ... 0.75 mm <sup>2</sup>
Cross section AWG	24 ... 18

## Standards and regulations

Standards/specifications	IEC 61076-2-101
--------------------------	-----------------

## Cable / line

### Cable structure

Signal type/category	Universal
----------------------	-----------

# Connector - SACC-MS-5CON-PG 7-M SCO



1542965

<https://www.phoenixcontact.com/pc/products/1542965>


Stripping length of the individual wire	5 mm
---	------

1542965

<https://www.phoenixcontact.com/pc/products/1542965>

## Drawings

Schematic diagram

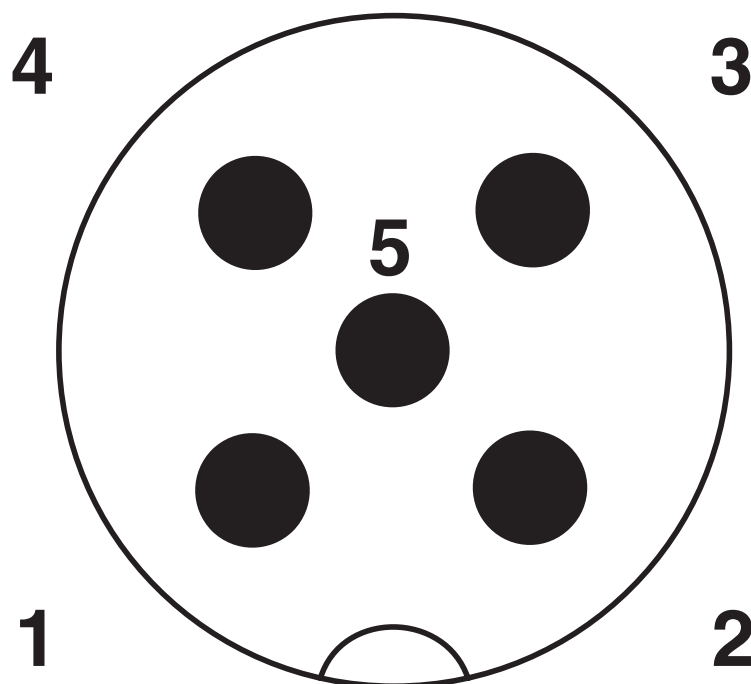


Pin assignment M12 male connector, 5-pos., A-coded, male side

# Connector - SACC-MS-5CON-PG 7-M SCO


1542965

<https://www.phoenixcontact.com/pc/products/1542965>

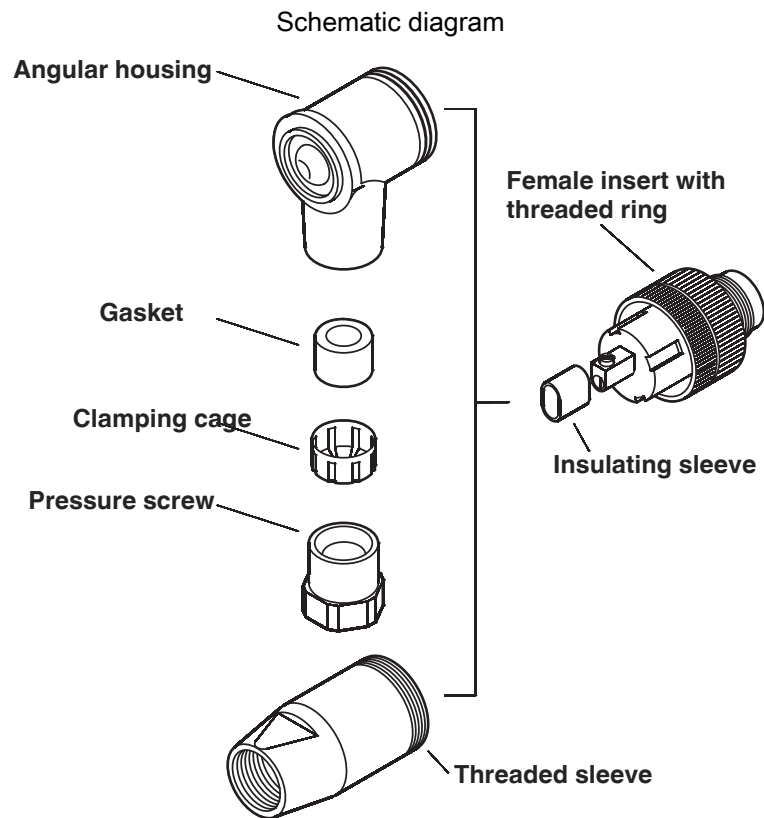

Male/Female M12

Dimensional drawing

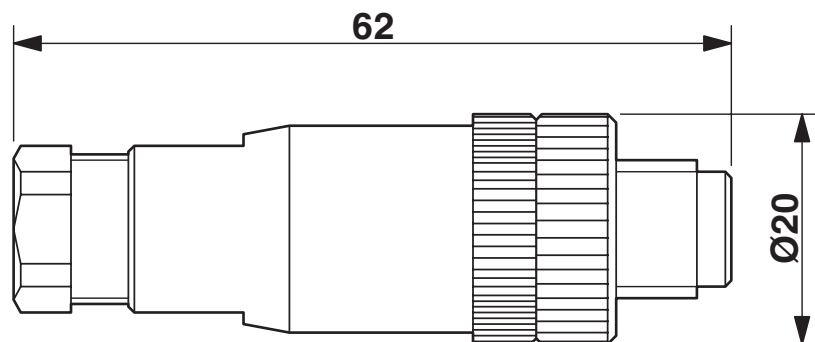

Plug, M12 x 1, straight, shielded


# Connector - SACC-MS-5CON-PG 7-M SCO

1542965

<https://www.phoenixcontact.com/pc/products/1542965>



Schematic diagram

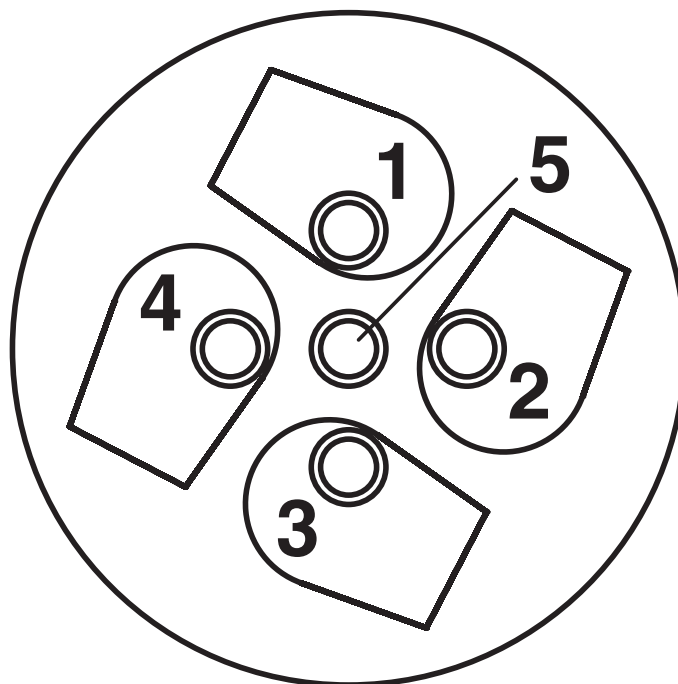

Cable connection side M12 (screw connection)



# Connector - SACC-MS-5CON-PG 7-M SCO



1542965

<https://www.phoenixcontact.com/pc/products/1542965>

## Classifications

### ECLASS

ECLASS-10.0.1	27440102
ECLASS-9.0	27440102
ECLASS-11.0	27440102

### ETIM

ETIM 8.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# Connector - SACC-MS-5CON-PG 7-M SCO



1542965

<https://www.phoenixcontact.com/pc/products/1542965>

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
	Imidazolidine-2-thione 96-45-7
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

# Connector - SACC-MS-5CON-PG 7-M SCO



1542965

<https://www.phoenixcontact.com/pc/products/1542965>

## Accessories

### Cable reel

Cable reel - SAC-5P-100,0-PUR/0,34 - 1501676

<https://www.phoenixcontact.com/pc/products/1501676>



By the meter, Cable reel, PUR halogen-free, black-gray RAL 7021, 5-wire, color single wire: brown, white, blue, black, green-yellow, cable length: 100 m

---

### Connector

Connector - SACC-M12-SET/2,5-3,5 - 1436505

<https://www.phoenixcontact.com/pc/products/1436505>



Sensor/actuator connector, accessories, pressure screw and Pg7 seal, for unshielded M12 connector, cable diameter 2.5 mm - 3.5 mm

# Connector - SACC-MS-5CON-PG 7-M SCO

1542965

<https://www.phoenixcontact.com/pc/products/1542965>

## Ferrule

Ferrule - A 0,25- 5 - 3202465

<https://www.phoenixcontact.com/pc/products/3202465>

Ferrule, length: 5 mm, color: silver



---

## Stripping tool

Stripping tool - WIREFOX SAC - 1212623

<https://www.phoenixcontact.com/pc/products/1212623>

Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length



# Connector - SACC-MS-5CON-PG 7-M SCO



1542965

<https://www.phoenixcontact.com/pc/products/1542965>

## Torque screwdriver

Torque screwdriver - TSD 04 SAC - 1208429

<https://www.phoenixcontact.com/pc/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

## Torque screwdriver

Torque screwdriver - TSD-M 1,2NM - 1212224

<https://www.phoenixcontact.com/pc/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

# Connector - SACC-MS-5CON-PG 7-M SCO



1542965

<https://www.phoenixcontact.com/pc/products/1542965>

## Adapter insert

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600

<https://www.phoenixcontact.com/pc/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

---

## Sealing cap

Sealing cap - PROT-M12 FS-PA-CHAIN - 1430873

<https://www.phoenixcontact.com/pc/products/1430873>



M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs

# Connector - SACC-MS-5CON-PG 7-M SCO



1542965

<https://www.phoenixcontact.com/pc/products/1542965>

## Crimping pliers

Crimping pliers - CRIMPFOX 6H - 1212046

<https://www.phoenixcontact.com/pc/products/1212046>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm<sup>2</sup> ... 6 mm<sup>2</sup>, unlockable pressure lock, lateral entry

---

## Tool

Tool - SACC BIT M12-D20 - 1208445

<https://www.phoenixcontact.com/pc/products/1208445>



Nut for assembling M12 connectors for assembly with a knurl diameter of 20 mm, for 4 mm hexagonal drive

---

Phoenix Contact 2022 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)