


Sensor/actuator cable - SAC-6P-M 8FS SH/.../...



1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjQzNS9QVVlvMw>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Sensor/actuator cable, 6-position, Variable cable type, shielded, free cable end, on Socket straight M8, cable length: Free input (0.2 ... 40.0 m)

Your advantages

- Easy and safe: 100% electrically tested plug-in components
- Reliable signal transmission – 360° shielding in environments with electromagnetic interference

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...



1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjZNS9QVVlvMw>

Commercial Data

Item number	1522435
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Sales Key	C1 - Sensor-Aktor-Kabel
Product Key	BF1BNA
Catalog Page	Page 206 (C-2-2019)
Customs tariff number	85444290
Country of origin	PL

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...



1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjQzNS9QVVlvMw>

Technical Data

Product properties

Product type	Sensor/actuator cable
Number of positions	6
Application	Standard
No. of cable outlets	1
Shielded	yes
Coding	A - standard

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	HB
Sealing material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Cable gland material	Zinc die-cast, nickel-plated

Electrical properties

Rated voltage in acc. with IEC 61076-2-101	30 V
Contact resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	30 V AC
	30 V DC
Nominal current I_N	1.5 A
Protective circuit	unwired

Connection data

Conductor connection

Tightening torque	0.2 NmM8 connectors
-------------------	---------------------

Connector

Insertion/withdrawal cycles	≥ 100
-----------------------------	------------

Header 1

Head design	free cable end
-------------	----------------

Header 2

Head design	Socket
Head cable outlet	straight

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...



1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjZNS9QVVlvMw>

Head thread type	M8
------------------	----


LED signaling

Status display	No
Status display present	No

Cable / line

Cable length	Free input (0.2 ... 40.0 m)
--------------	-----------------------------

PUR halogen-free black [PUR]

Dimensional drawing	
Shielded	yes
Cable weight	34 kg/km
Cable type	PUR halogen-free black
Cable type (abbreviation)	PUR
External cable diameter	5.20 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Conductor structure signal line	18x 0.10 mm
AWG signal line	26
Conductor cross section	6x 0.14 mm ² (Signal line)
Wire diameter incl. insulation	1.05 mm ±0.02 mm
Single wire, color	Brown, white, black, blue, gray, pink
Smallest bending radius, fixed installation	52 mm
Smallest bending radius, movable installation	52 mm
Number of bending cycles	4000000
Bending radius	52 mm
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	10 m/s ²
Halogen-free	in accordance with DIN VDE 0472 part 815
Resistance to oil	in accordance with DIN EN 60811-2-1
Flame resistance	in accordance with DIN UL-Style 20549
Other resistance	Highly resistant to acids, alkaline solutions and solvents hydrolysis and microbe resistant partly UV-resistant in accordance with DIN EN ISO 4892-2-A

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...



1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjZzNS9QVVlvMw>

Special properties	Flexible cable conduit capable
	Silicone-free
	Free of substances which would hinder coating with paint or varnish
Ambient temperature (operation)	-5 °C ... 80 °C (Cable, flexible installation)
	-40 °C ... 80 °C (cable, fixed installation)
Note	This item is a sensor/actuator cable with a freely selectable cable type. The technical data for all possible cable types is listed in the table below.

Cable structure

Cable type	PUR halogen-free black
Short symbol	PUR

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)

Standards and regulations

Standards/specifications	IEC 61076-2-104
--------------------------	-----------------


Sensor/actuator cable - SAC-6P-M 8FS SH/.../...

1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjZzNS9QVVlvMw>


Drawings

Dimensional drawing

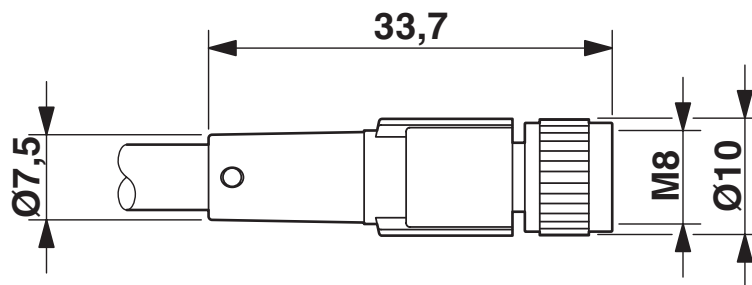

Socket M8 x 1, straight

Circuit diagram

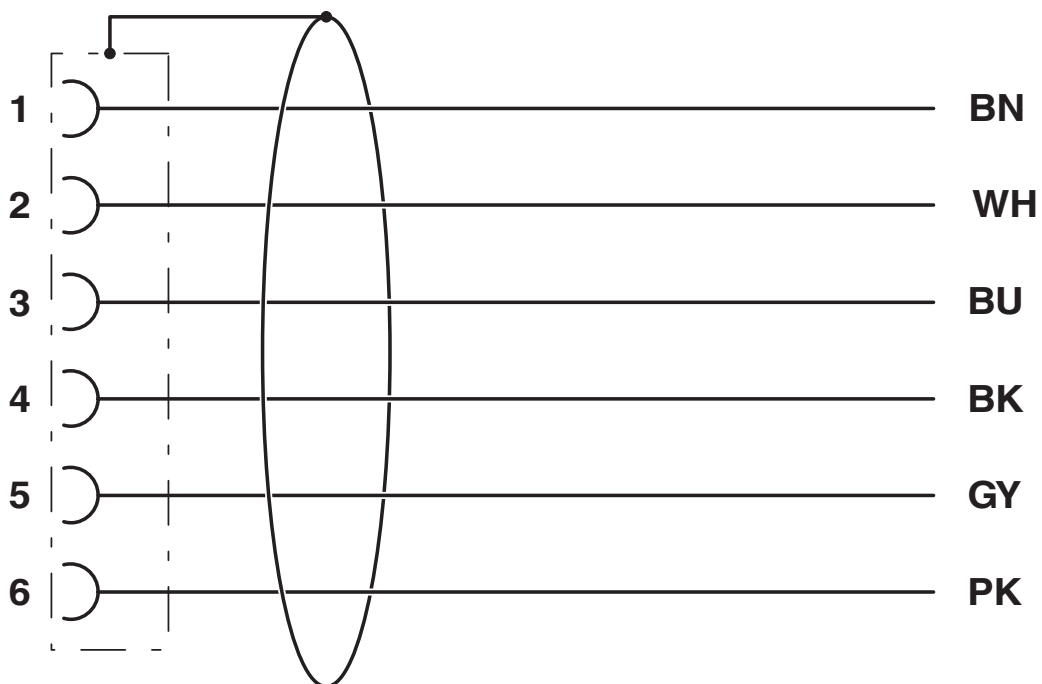


Contact assignment of M8 socket

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...

1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjZNS9QVVlVmw>

Schematic diagram

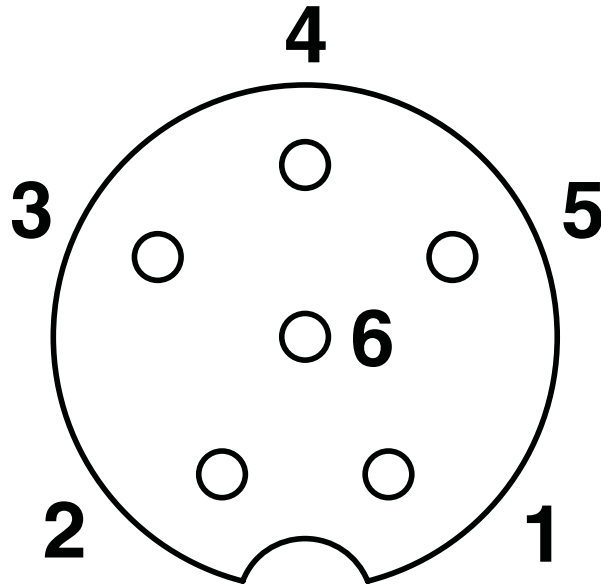

Pin assignment M8 socket, 6-pos.


Sensor/actuator cable - SAC-6P-M 8FS SH/.../...





1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjZNS9QVVlvMw>

Approvals

 UL Listed Approval ID: FILE E 221474				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	30 V	1.5 A	-	-

 cUL Listed Approval ID: FILE E 221474				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	30 V	1.5 A	-	-

 EAC Approval ID: RU D-DE.HB35.B.00387	
---	--

cULus Listed

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...



1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjQzNS9QVVlvMw>

Classifications

ECLASS

ECLASS-9.0	27060311
ECLASS-10.0.1	27060311
ECLASS-11.0	27060311

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...



1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjQzNS9QVVlvMw>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...



1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjQzNS9QVVlvMw>

Accessories

Insert label

Insert label - PABA WH/23 - 1013779

<https://www.phoenixcontact.com/de/produkte/1013779>



Insert label, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 20

Insert label

Insert label - PABA YE/23 - 1013782

<https://www.phoenixcontact.com/de/produkte/1013782>



Insert label, Strip, yellow, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 20

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...

1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjZNS9QVVlvMw>

Marker pen

Marker pen - B-STIFT - 1051993

<https://www.phoenixcontact.com/de/produkte/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Diagonal cutter

Diagonal cutter - CUTFOX-S VDE - 1212207

<https://www.phoenixcontact.com/de/produkte/1212207>



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...

1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjQzNS9QVVVlMw>

Stripping tool

Stripping tool - WIREFOX SAC-1 - 1212757

<https://www.phoenixcontact.com/de/produkte/1212757>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 3.2 to 4.4 mm, any stripping length

Stripping tool

Stripping tool - WIREFOX SAC - 1212623

<https://www.phoenixcontact.com/de/produkte/1212623>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...

1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjQzNS9QVVlvMw>

Stripping tool

Stripping tool - WIREFOX 10 - 1212150

<https://www.phoenixcontact.com/de/produkte/1212150>



Stripping tool, for cables and conductors from 0.02 - 10 mm², self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm² stranded/1.5 mm² solid, replaceable stripping blade

Protective hose adapter

Protective hose adapter - WP-CTA POM 13,0 BK - 1422884

<https://www.phoenixcontact.com/de/produkte/1422884>



Protective hose adapter, for corrugated hoses with a nominal size of 13 (10 x 13), corrugated in parallel

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...

1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjQzNS9QVVlvMw>

Protective hose

Protective hose - WP-PA HF 13,0 BK - 3240681

<https://www.phoenixcontact.com/de/produkte/3240681>



Protective hose, material: PA 6, filament: without, UV-resistant: yes, flexible, degree of protection: IP68, color: black, inflammability class in acc. with UL 94: V0, inner diameter: 10 mm, Total length: 50 m

Protective hose

Protective hose - WP-PA HF-HB 13,0 BK - 3240839

<https://www.phoenixcontact.com/de/produkte/3240839>



Protective hose, material: PA 6, filament: without, UV-resistant: yes, flexible, degree of protection: IP68, color: black, inflammability class in acc. with UL 94: HB, inner diameter: 10 mm, Total length: 50 m

Sensor/actuator cable - SAC-6P-M 8FS SH/.../...

1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjQzNS9QVVlvMw>

Screw plug

Screw plug - PROT-M 8 MS-PA-CHAIN - 1430860

<https://www.phoenixcontact.com/de/produkte/1430860>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



Torque screwdriver

Torque screwdriver - TSD 02 SAC - 1208487

<https://www.phoenixcontact.com/de/produkte/1208487>

Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors



Sensor/actuator cable - SAC-6P-M 8FS SH/.../...

1522435/PUR/3

<https://www.phoenixcontact.com/de/produkte/1522435?orderkey=MTUyMjZNS9QVVlvMw>

Tool

Tool - SAC BIT M8-D10 - 1208461

<https://www.phoenixcontact.com/de/produkte/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH

Flachsmarktstraße 8

D-32825 Blomberg

+49 52 35/3-1 20 00

info@phoenixcontact.de