

Cable gland - HC-B-G-M40-PLRBK

1407672

<https://www.phoenixcontact.com/pc/products/1407672>



Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



EVO plastic cable gland with bayonet locking, for housing series B, size M40, cable diameter: 19 ... 28 mm

Cable gland - HC-B-G-M40-PLRBK

1407672

<https://www.phoenixcontact.com/pc/products/1407672>



Commercial Data

Item number	1407672
Packing unit	1 pc
Minimum order quantity	1 pc
Product Key	BF7APL
Catalog Page	Page 604 (C-2-2019)
GTIN	4046356776400
Weight per Piece (including packing)	65.4 g
Weight per Piece (excluding packing)	65.3 g
Customs tariff number	39269097
Country of origin	PL

Cable gland - HC-B-G-M40-PLRBK

1407672


<https://www.phoenixcontact.com/pc/products/1407672>

Technical Data

Product properties

Product type	Cable gland with bayonet locking
No. of conductors	1
Type of the screw connection	M40
Shielded	no

Dimensions

Dimensional drawing	
Width	48.8 mm
Height	81.5 mm
Depth	74.8 mm
Wrench size, union nut	36 mm

Material specifications

Color	black
Material	PA
Flammability rating according to UL 94	V0 / V2
Sealing material	NBR (O-ring) NBR ()
Material, pressure screw	PA-GF
Cable seal material	NBR
Cable gland material	PA

Connector

Material	PA
Material	PA

Cable / line

Cable structure

External cable diameter	19 mm ... 28 mm
-------------------------	-----------------

Master cable data/connection data

Tightening torque, union nut	7.50 Nm
------------------------------	---------

Mechanical properties

Mechanical data

Type of the screw connection	M40
------------------------------	-----

Cable gland - HC-B-G-M40-PLRBK



1407672

<https://www.phoenixcontact.com/pc/products/1407672>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
Degree of protection	12 (UL 50e)
Ambient temperature (operation)	-40 °C ... 100 °C

Mounting

Assembly instructions	Bayonet locking max. 3x can be removed
-----------------------	--

Cable gland - HC-B-G-M40-PLRBK


1407672

<https://www.phoenixcontact.com/pc/products/1407672>



Drawings

Dimensional drawing

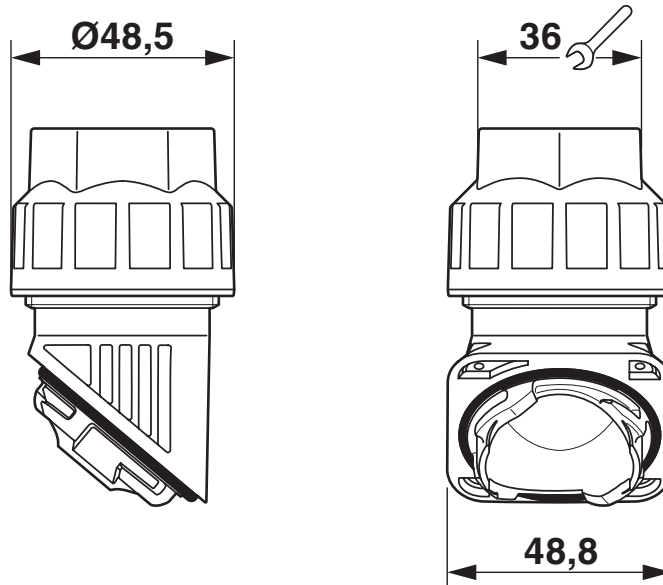

Dimensional drawing

Cable gland - HC-B-G-M40-PLRBK



1407672

<https://www.phoenixcontact.com/pc/products/1407672>

Approvals

DNV

Approval ID: TAE000037S



cUL Recognized

Approval ID: E255026



UL Recognized

Approval ID: E255026



EAC

Approval ID: RU C-DE.AI30.B.01102



EAC

Approval ID: RU D-DE.HB35.B.00387

cULus Recognized

Cable gland - HC-B-G-M40-PLRBK



1407672

<https://www.phoenixcontact.com/pc/products/1407672>

Classifications

ECLASS

ECLASS-9.0	27144432
ECLASS-10.0.1	27144432
ECLASS-11.0	27144432

ETIM

ETIM 8.0	EC000441
----------	----------

UNSPSC

UNSPSC 21.0	39121300
-------------	----------

Cable gland - HC-B-G-M40-PLRBK

1407672

<https://www.phoenixcontact.com/pc/products/1407672>



Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Cable gland - HC-B-G-M40-PLRBK

1407672

<https://www.phoenixcontact.com/pc/products/1407672>



Accessories

Corrugated tube screw connection

Corrugated tube screw connection - WP-GR HF CTA M40 BK - 3241223

<https://www.phoenixcontact.com/pc/products/3241223>



Corrugated pipe adapter, with M40 internal thread, straight, black, IP66, for connecting corrugated pipes to HEAVYCON EVO plastic cable glands or ADVANCE plastic housings.

Closing cap

Closing cap - SEALING PLUG 25X30 RD - 1421863

<https://www.phoenixcontact.com/pc/products/1421863>



Closing cap, material: PA, color: red

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com