

https://www.phoenixcontact.com/nz/products/2792002



Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Electronic housing, for PCB insertion, fully equipped with 3 screw or 6 tab connections per side

Commercial Data

Item number	2792002
Packing unit	10 pc
Minimum order quantity	10 pc
Sales Key	ACHCCB
Product Key	ACHCCB
Catalog Page	Page 724 (C-1-2013)
GTIN	4017918072513
Weight per Piece (including packing)	56 g
Weight per Piece (excluding packing)	56 g
Customs tariff number	85389090
Country of origin	DE



https://www.phoenixcontact.com/nz/products/2792002



Technical Data


Product properties

Туре	Connection system integrated, housing closed
Product type	Complete housing
Number of positions	6
Pitch	5 mm
Number of rows	1
Туре	Complete housing equipped with 3 screw connections per side
Housing type	Component housing
Housing series	UEG
Pin layout	Linear pinning

Electrical properties

Nominal voltage U _N	500 V (Voltage and current values are affected by the configuration of the printed circuit board.)	
Nominal current I _N	10 A	

Dimensions

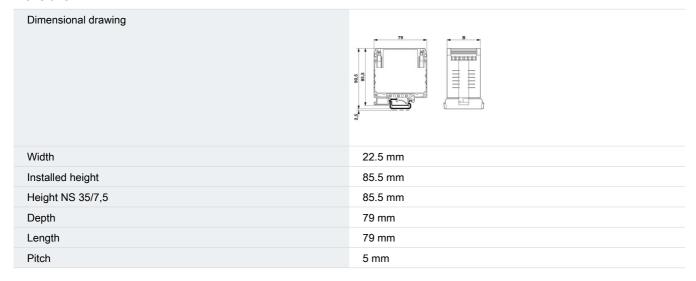

Material specifications

Color	green
Flammability rating according to UL 94	V0
Surface characteristics	untreated
Housing material	Polyamide

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C 105 °C



https://www.phoenixcontact.com/nz/products/2792002



Mounting


Mounting type	DIN rail mounting
Pin layout	Linear pinning


2792002

https://www.phoenixcontact.com/nz/products/2792002



Drawings



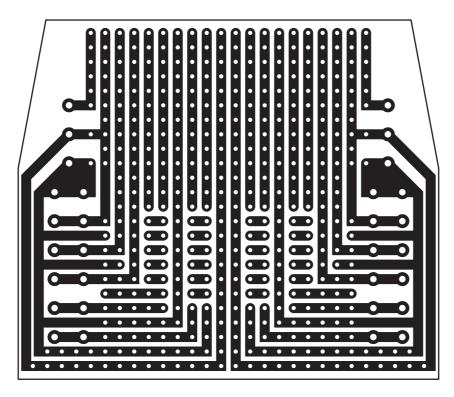




https://www.phoenixcontact.com/nz/products/2792002



Dimensional drawing

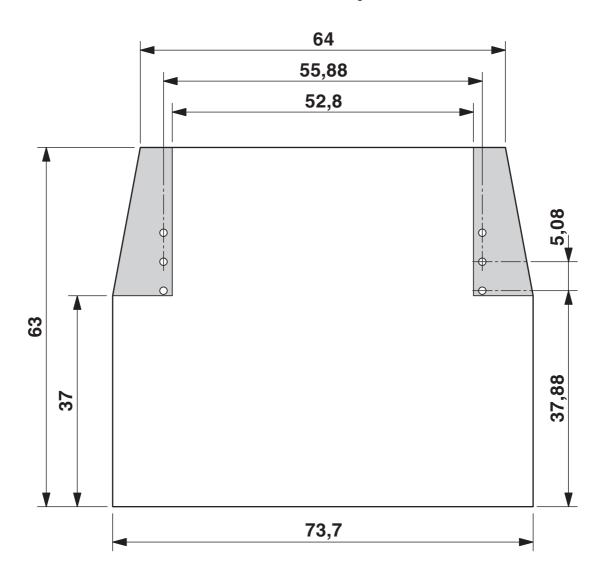


2792002

https://www.phoenixcontact.com/nz/products/2792002




Dimensional drawing



UEGM 22,5... with 1 PCB, 6 positions or 12 positions (FS/FS)









https://www.phoenixcontact.com/nz/products/2792002



Dimensional drawing

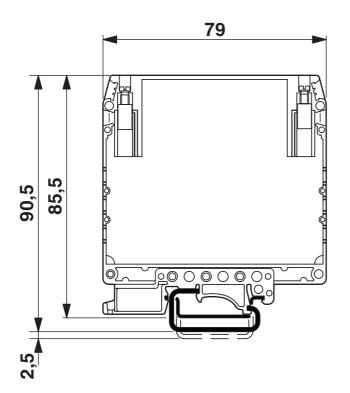

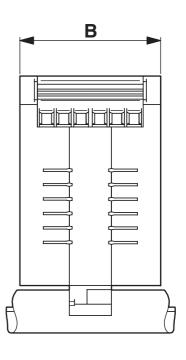



https://www.phoenixcontact.com/nz/products/2792002



Approvals



EAC

Approval ID: B.01687

CULus Recognized Approval ID: E60425-19770427				
	Nominal Voltage U _N	Nominal Current I _N	Cross Section AWG	Cross Section mm ²
Use group B				
	300 V	10 A	30 - 12	-
Use group D				
	300 V	10 A	30 - 12	-



https://www.phoenixcontact.com/nz/products/2792002



Classifications

ECLASS

	ECLASS-9.0	27182702	
	ECLASS-10.0.1	27182702	
	ECLASS-11.0	27182702	
ETIM			
	ETIM 8.0	EC001031	
UNSPSC			
	UNSPSC 21.0	31261500	



https://www.phoenixcontact.com/nz/products/2792002



Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"



https://www.phoenixcontact.com/nz/products/2792002



Accessories

Wire bridge

Wire bridge - DB 50- 90 GY - 2820929 https://www.phoenixcontact.com/nz/products/2820929

Flexible wire loop bridge, 50-pos., conductor cross-section: 0.5 mm², loop length: 90 mm, ferrule length: 8 mm, color: gray



Phoenix Contact 2022 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Unit 15C, 906-930 Great South Road, Penrose Auckland 1061 0508 474 636 sales@phoenixcontact.co.nz