

Contact insert module - HC-M-02-AT-M-10



1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Contact insert module, number of positions: 2, power contacts: 2, control contacts: 0, Pin, Axial screw connection, 830 V, 40 A, 2.5 mm² ... 10 mm², application: Power

Contact insert module - HC-M-02-AT-M-10



1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Commercial Data

Item number	1417389
Packing unit	2 pc
Minimum order quantity	2 pc
Product Key	BF7ACE
Catalog Page	Page 573 (C-2-2019)
GTIN	4055626112695
Weight per Piece (including packing)	26.3 g
Weight per Piece (excluding packing)	24.9 g
Customs tariff number	85366990
Country of origin	PL

Contact insert module - HC-M-02-AT-M-10



1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Technical Data

Notes

General	For HEAVYCON HC-B6 to B48 housing, snap-in module frame required, axial connection for 2 mm Allen key
General	Connectors may be operated only when there is no load/voltage.
General	The axial screw connection must be established using a 2 mm Allen key (for stranded conductors only)

Product properties

Product type	Modular contact insert
Number of positions	2
Connection profile	2
Application	Power
Number of module slots	1
No. of power contacts	2
No. of control contacts	0
Series	HC-M-02

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data


Connection technology

Connection technology	Axial screw connection
Connection in acc. with standard	IEC / EN

Conductor connection

Connection cross section AWG	12 ... 10
Tightening torque	1.5 Nm (2.5 mm ² ... 4 mm ²)
	2 Nm (6 -8 mm ²)
Stripping length of the individual wire	5 mm +1 mm (2.5 mm ² ... 4 mm ²)
	8 mm +1 mm (4 mm ²)
	11 mm +1 mm (10 mm ²)

Dimensions

Dimensional drawing	
Width	34.2 mm
Height	34.7 mm

Contact insert module - HC-M-02-AT-M-10



1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Length	14.6 mm
--------	---------

Mechanical characteristics

Contact diameter	4 mm
------------------	------

Electrical properties

Rated voltage (III/2) contacts	1000 V
Rated voltage (III/3)	830 V
Rated surge voltage (III/2)	8 kV
Rated surge voltage (III/3)	8 kV
Rated surge voltage	8 kV
Rated current	40 A

Material specifications

Color	light grey
Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC
Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Connector

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Cable / line

Cable structure

Stripping length of the individual wire	5 mm +1 mm (2.5 mm ² ... 4 mm ²)
	8 mm +1 mm (4 mm ²)
	11 mm +1 mm (10 mm ²)

Mounting

Assembly instructions	To ensure correct use, installation in housing with IP54 protection or better is required
-----------------------	---

Note regarding axial connection technology:

Only for stranded wires. The specified conductor cross sections refer to the geometric cross section of the cable used. Cables with a geometric cross section which deviates significantly from the nominal cable cross section must be checked before use.

The axial connection technology connection space is designed for fine strand cables according to VDE 0295 Class 5. Deviating cable structures (e.g., Class 6 cables) must be checked before use.

Assembly instructions

Before assembly, ensure that the tapered screw is fully loosened (chamber is open). Cables must not be twisted. The wires must be pushed into the contact chamber as far as they will go (until the insulation touches the contact). Hold the wires in position and tighten using an Allen key. The used wire end must be cut off before reconnection. The terminal screw must only be retightened once to prevent the litz wires from breaking. To prevent damage to the contact, the wire/cable must be mechanically held at an appropriate distance from the connection point (e.g., when used in a plate cut out). For notes on correct execution, see DIN VDE 0100-520:2003-06. Unused connections must be tightened with maximum torque.

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Standards and regulations

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---


Contact insert module - HC-M-02-AT-M-10

1417389


<https://www.phoenixcontact.com/pc/products/1417389>

Drawings

Dimensional drawing

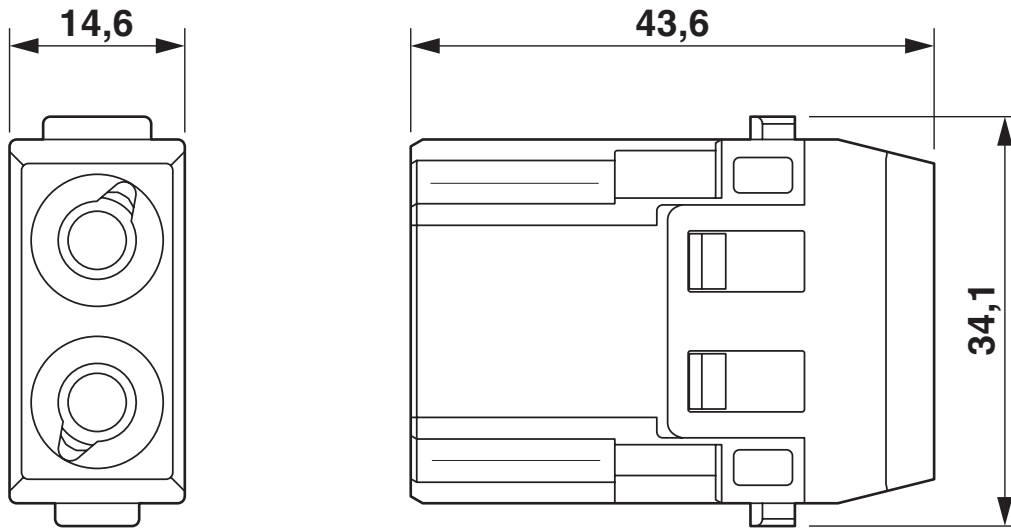


Male insert

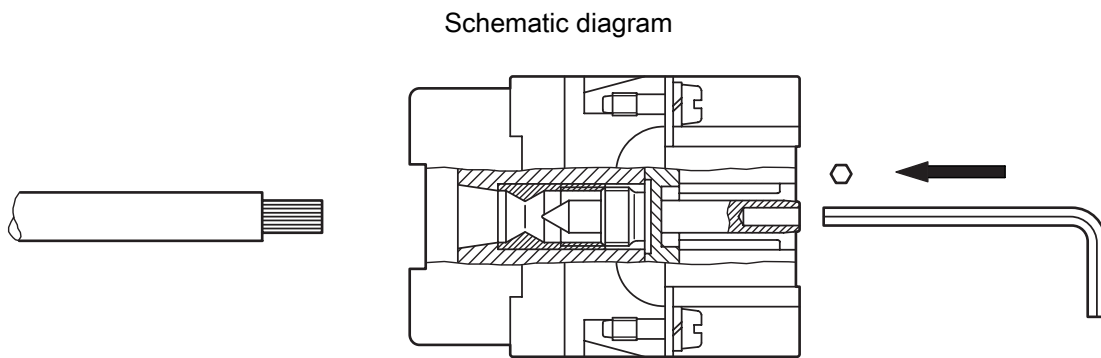

Axial connection (2 mm Allen key)

1417389

<https://www.phoenixcontact.com/pc/products/1417389>

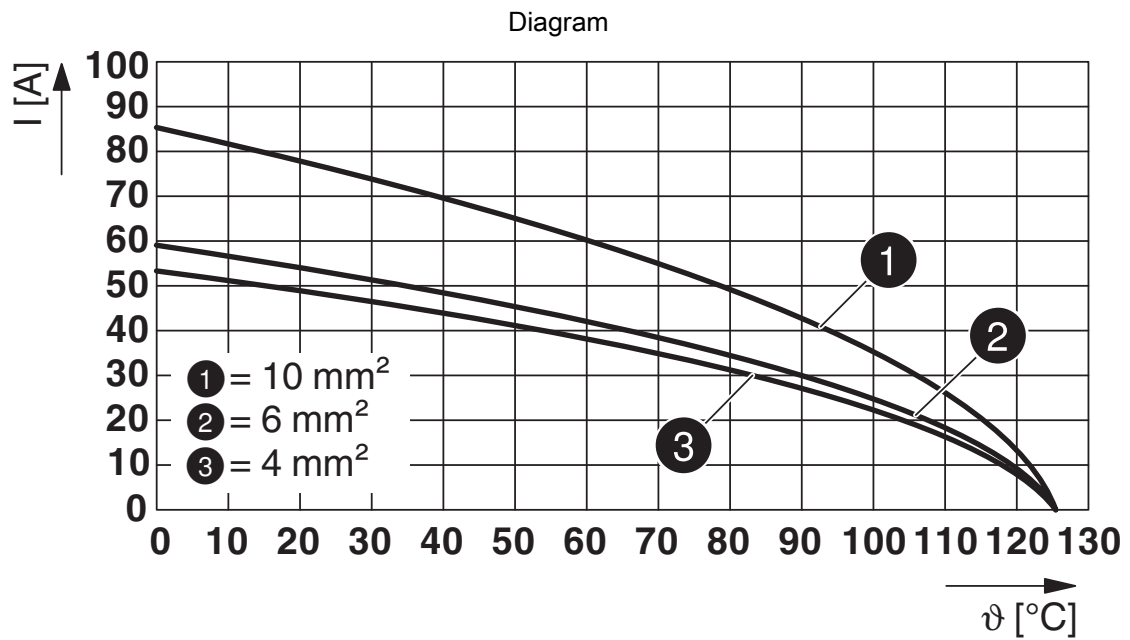

Derating diagram

Contact insert module - HC-M-02-AT-M-10



1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Approvals

DNV

Approval ID: TAE000037S



CSA

Approval ID: 13631

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	600 V	45 A	- 8	-



UL Recognized

Approval ID: E118976

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	600 V	55 A	- 8	-



EAC

Approval ID: RU C-DE.AI30.B.01102



EAC

Approval ID: RU C-DE.BL08.B.00511

Contact insert module - HC-M-02-AT-M-10



1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Classifications

ECLASS

ECLASS-9.0	27440217
ECLASS-10.0.1	27440217
ECLASS-11.0	27440217

ETIM

ETIM 8.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Contact insert module - HC-M-02-AT-M-10



1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Contact insert module - HC-M-02-AT-M-10

1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Accessories

Screwdriver

Screwdriver - SF-THEX 2-100 - 1212637

<https://www.phoenixcontact.com/pc/products/1212637>




T-handle screwdriver, for Allen screws, hexagonal (with chamfer), size: hex 2 x 100 mm, ergonomically shaped handle, matt chrome-plated

Module carrier frame

Module carrier frame - HC-M-B06-MFH-B - 1182085

<https://www.phoenixcontact.com/pc/products/1182085>



Module carrier frame, size: B6, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame

Contact insert module - HC-M-02-AT-M-10

1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Module carrier frame

Module carrier frame - HC-M-B10-MFH-B - 1182088

<https://www.phoenixcontact.com/pc/products/1182088>




Module carrier frame, size: B10, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame

Module carrier frame

Module carrier frame - HC-M-B16-MFH-B - 1182090

<https://www.phoenixcontact.com/pc/products/1182090>



Module carrier frame, size: B16, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame

Contact insert module - HC-M-02-AT-M-10

1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Module carrier frame

Module carrier frame - HC-M-B24-MFH-B - 1182094

<https://www.phoenixcontact.com/pc/products/1182094>

Module carrier frame, size: B24, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame



Module carrier frame

Module carrier frame - HC-M-B06-MFH-H - 1182087

<https://www.phoenixcontact.com/pc/products/1182087>

Module carrier frame, size: B6, type : for the sleeve side (A, B, C, ...), 4 mm² ... 6 mm², application: Module carrier frame



Contact insert module - HC-M-02-AT-M-10


1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Module carrier frame

Module carrier frame - HC-M-B10-MFH-H - 1182089

<https://www.phoenixcontact.com/pc/products/1182089>




Module carrier frame, size: B10, type : for the sleeve side (A, B, C, ...), 4 mm² ... 6 mm², application: Module carrier frame

Module carrier frame

Module carrier frame - HC-M-B16-MFH-H - 1182093

<https://www.phoenixcontact.com/pc/products/1182093>



Module carrier frame, size: B16, type : for the sleeve side (A, B, C, ...), 4 mm² ... 6 mm², application: Module carrier frame

Contact insert module - HC-M-02-AT-M-10

1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Module carrier frame

Module carrier frame - HC-M-B24-MFH-H - 1182095

<https://www.phoenixcontact.com/pc/products/1182095>

Module carrier frame, size: B24, type : for the sleeve side (A, B, C, ...), 4 mm² ...
6 mm², application: Module carrier frame



Screw insert

Screw insert - SF-BIT-HEX 2-89 S - 1200300

<https://www.phoenixcontact.com/pc/products/1200300>

Screw bit, hexagon, E6.3-1/4" drive, size: Hex 2 x 89 mm, hardened, suitable for
holder according to DIN 3126-F6.3/ISO 1173



Contact insert module - HC-M-02-AT-M-10



1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Torque screwdriver

Torque screwdriver - TSD-M 3NM - 1212225

<https://www.phoenixcontact.com/pc/products/1212225>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 1.2 - 3 Nm

Coding element

Coding element - HC-CBU-MOD - 1636130

<https://www.phoenixcontact.com/pc/products/1636130>



Coding socket for coding up to 16 connectors, for HC Modular

Contact insert module - HC-M-02-AT-M-10

1417389

<https://www.phoenixcontact.com/pc/products/1417389>

Coding element

Coding element - HC-CST-MOD - 1636127

<https://www.phoenixcontact.com/pc/products/1636127>



Coding peg for coding up to 16 connectors, for HC Modular

Contact insert module

Contact insert module - HC-M-02-AT-F-10 - 1417387

<https://www.phoenixcontact.com/pc/products/1417387>



Contact insert module, number of positions: 2, power contacts: 2, control contacts: 0, Socket, Axial screw connection, 830 V, 40 A, 2.5 mm² ... 10 mm², application: Power

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com